

Good Relationships

The Spring Data Neo4j Guide Book

2.1.0.M1

Copyright © 2010 - 2011 Michael Hunger

Copies of this document may be made for your own use and for distribution to others, provided that you do not charge any fee for such copies and further provided that each copy contains this Copyright Notice, whether distributed in print or electronically. Copyright 2010-2011 Neo Technology

Foreword by Rod Johnson	v
Foreword by Emil Eifrem	vi
About this guide book	vii
1. The Spring Data Neo4j Project	vii
2. Feedback	vii
3. Format of the Book	vii
4. Acknowledgements	vii
I. Tutorial	1
1. Introducing our project	2
2. The Spring stack	3
2.1. Required setup	3
3. The domain model	5
4. Learning Neo4j	7
5. Spring Data Neo4j	9
6. Annotating the domain	10
7. Indexing	11
8. Repositories	12
9. Relationships	14
9.1. Creating relationships	14
9.2. Accessing related entities	15
9.3. Accessing the relationship entities	16
10. Get it running	17
10.1. Populating the database	17
10.2. Inspecting the datastore	17
10.2.1. Neoclipse visualization	17
10.2.2. The Neo4j Shell	18
11. Web views	20
11.1. Searching	21
11.2. Listing results	21
12. Adding social	24
12.1. Users	24
12.2. Ratings for movies	25
13. Adding Security	26
14. More UI	30
15. Importing Data	33
16. Recommendations	36
17. Neo4j Server	37
17.1. Getting Neo4j-Server	37
17.2. Other approaches	38
18. Conclusion	39
II. Reference Documentation	40
Reference Documentation	xli
1. Spring Data and Spring Data Neo4j	xli
2. Reference Documentation Overview	xli
19. Introduction to Neo4j	44
19.1. What is a graph database?	44
19.2. About Neo4j	44
19.3. GraphDatabaseService	44
19.4. Creating nodes and relationships	45

19.5. Graph traversal	45
19.6. Indexing	45
19.7. Querying the Graph with Cypher	46
19.8. Gremlin a Graph Traversal DSL	47
20. Programming model	48
20.1. Object Graph Mapping	48
20.2. Advanced Mapping with AspectJ	48
20.2.1. AspectJ IDE support	49
20.3. Simple Object Graph Mapping	50
20.4. Defining node entities	51
20.4.1. @NodeEntity: The basic building block	51
20.4.2. @GraphId: Neo4j -id field	51
20.4.3. @GraphProperty: Optional annotation for property fields	52
20.4.4. @Indexed: Making entities searchable by field value	52
20.4.5. @Query: fields as query result views	52
20.4.6. @GraphTraversal: fields as traversal result views	53
20.5. Relating node entities	53
20.5.1. @RelatedTo: Connecting node entities	53
20.5.2. @RelationshipEntity: Rich relationships	55
20.5.3. @RelatedToVia: Accessing relationship entities	56
20.6. Indexing	56
20.6.1. Exact and numeric index	56
20.6.2. Fulltext indexes	57
20.6.3. Unique indexes	58
20.6.4. Manual index access	58
20.6.5. Index queries in Neo4jTemplate	59
20.6.6. Neo4j Auto Indexes	59
20.6.7. Spatial Indexes	59
20.7. Neo4jTemplate	59
20.7.1. Basic operations	60
20.7.2. Core-Operations	60
20.7.3. Entity-Persistence	60
20.7.4. Result	61
20.7.5. Indexing	61
20.7.6. Graph traversal	61
20.7.7. Cypher Queries	61
20.7.8. Gremlin Scripts	61
20.7.9. Transactions	61
20.7.10. Neo4j REST Server	61
20.8. CRUD with repositories	62
20.8.1. CRUDRepository	62
20.8.2. IndexRepository and NamedIndexRepository	63
20.8.3. TraversalRepository	63
20.8.4. Query and Finder Methods	63
20.8.5. CypherDSL repository	67
20.8.6. CypherDSL and QueryDSL	68
20.8.7. Creating repositories	68
20.8.8. Composing repositories	69
20.9. Projecting entities	71

20.10. Geospatial Queries	71
20.11. Active Record Methods for Advanced Mapping Mode	72
20.12. Transactions	74
20.13. Detached node entities in advanced mapping mode	76
20.13.1. Relating detached entities	76
20.14. Entity type representation	77
20.15. Bean validation (JSR-303)	78
21. Environment setup	80
21.1. Dependencies for Spring Data Neo4j Simple Mapping	80
21.2. Gradle configuration for Advanced Mapping (AspectJ)	80
21.3. Ant/Ivy configuration for Advanced Mapping (AspectJ)	81
21.4. Maven configuration for Advanced Mapping	81
21.4.1. Repositories	81
21.4.2. Dependencies	81
21.4.3. Maven AspectJ build configuration	82
21.5. Spring configuration	83
21.5.1. XML namespace	83
21.5.2. Repository Configuration	85
21.5.3. Java-based bean configuration	85
22. Cross-store persistence	87
22.1. Partial entities	87
22.2. Cross-store annotations	87
22.2.1. @NodeEntity(partial = "true")	87
22.2.2. @GraphProperty	87
22.2.3. Example	88
22.3. Configuring cross-store persistence	88
23. Sample code	90
23.1. Introduction	90
23.2. Hello Worlds sample application	90
23.3. IMDB sample application	90
23.4. MyRestaurants sample application	91
23.5. MyRestaurant-Social sample application	91
23.6. Cineasts social movie database	92
24. Heroku: Seeding the Cloud	94
24.1. Create a Self-Hosted Web Application	94
24.2. Deploy to Heroku	97
25. Performance considerations	98
25.1. When to use Spring Data Neo4j	98
26. AspectJ details	99
27. Neo4j Server	100
27.1. Server Extension	100
27.2. Using Spring Data Neo4j as a REST client	101

Foreword by Rod Johnson

I'm excited about Spring Data Neo4j for several reasons.

First, this project is in a very important space. We are in an era of transition. A very few years ago, a relational database was a given for storing nearly all the data in nearly all applications. While relational databases remain important, new application requirements and massive data proliferation have prompted a richer choice of data stores. Graph databases have some very interesting strengths, and Neo4j is proving itself valuable in many applications. It's a choice you should add to your toolbox.

Second, Spring Data Neo4j is an innovative project, which makes it easy to work with one of the most interesting new data stores. Unfortunately, the proliferation of new data stores has not been matched by innovation in programming models to work with them. Ironically, just after modern ORM mapping made working with relational data in Java relatively easy, the data store disruption occurred, and developers were back to square one: struggling once more with clumsy, low level APIs. Working with most non-relational technologies is overly complex and imposes too much work on developers. Spring Data Neo4j makes working with Neo4j amazingly easy, and therefore has the potential to make you more successful as a developer. Its use of AspectJ to eliminate persistence code from your domain model is truly innovative, and on the cutting edge of today's Java technologies.

Third, I'm excited about Spring Data Neo4j for personal reasons. I no longer get to write code as often as I would like. My initial convictions that Spring and AspectJ could both make building applications with Neo4j dramatically easier and cross-store object navigation possible gave me an excuse for a much-needed coding binge early in 2010. This led to a prototype of what became Spring Data Neo4j — at times written paired with Emil. I'm sure the vast majority of my code has long since been replaced (probably for the better) by coders who aren't rusty — thanks Michael and Thomas! — but I retain my pleasant memories.

Finally, Spring Data Neo4j is part of the broader Spring Data project: one of the key areas in which Spring is innovating to help meet new application requirements. I encourage you to explore Spring Data, and — better still — become involved in the community and contribute.

Enjoy the Spring Data Neo4j book, and happy coding!

Rod Johnson, Founder, Spring and SVP, Application Platform, VMware

Foreword by Emil Eifrem

"Spring is the most popular middleware on the planet," I thought to myself as I walked up to Rod Johnson in late 2009 at the JAOO conference in Aarhus, Denmark. Rod had just given an introductory presentation about Spring Roo and when he was done I told him "Great talk. You're clearly building a stack for the future. What about support for non-relational databases?"

We started talking and quickly agreed that NOSQL will play an important role in emerging stacks. Now, a year and half later, Spring Data Neo4j is available in its first stable release and I'm blown away by the result. Never before in any environment, in any programming framework, in any stack, has it been so easy and intuitive to tap into the power of a graph database like Neo4j. It's a testament to the efforts by an awesome team of four hackers from Neo Technology and VMware: Michael Hunger, David Montag, Thomas Risberg and Mark Pollack.

The Spring framework revolutionized how we all wrote enterprise Java applications and today it's used by millions of enterprise developers. Graph databases also stand out in the NOSQL crowd when it comes to enterprise adoption. You can find graph databases used in areas as diverse as network management, fraud detection, cloud management, anything with social data, geo and location services, master data management, bioinformatics, configuration databases, and much more.

Spring developers deserve access to the best tools available to solve their problem. Sometimes that's a relational database accessed through JPA. But more often than not, a graph database like Neo4j is the perfect fit for your project. I hope that Spring Data Neo4j will give you access to the power and flexibility of graph databases while retaining the familiar productivity and convenience of the Spring framework.

Enjoy the Spring Data Neo4j guide book and welcome to the wonderful world of graph databases!

Emil Eifrem, CEO of Neo Technology

About this guide book

1. The Spring Data Neo4j Project

Welcome to the Spring Data Neo4j Guide Book. Thank you for taking the time to get an in depth look into [Spring Data Neo4j](#). This project is part of the [Spring Data project](#), which brings the convenient programming model of the Spring Framework to modern NOSQL databases. Spring Data Neo4j, as the name alludes to, aims to provide support for the graph database [Neo4j](#).

2. Feedback

It was written by developers for developers. Hopefully we've created a guide that is well received by our peers.

If you have any feedback on Spring Data Neo4j or this book, please provide it via the [SpringSource JIRA](#), the [SpringSource NOSQL Forum](#), [github comments or issues](#), or the [Neo4j mailing list](#).

3. Format of the Book

This book is presented as a [duplex book](#), a term coined by Martin Fowler. A duplex book consists of at least two parts. The first part is an easily accessible tutorial or narrative that gives the reader an overview of the topics contained in the book. It contains lots of examples and discussion topics. This part of the book is highly suited for cover-to-cover reading.

We chose a tutorial describing the creation of a web application that allows movie enthusiasts to find their favorite movies, rate them, connect with fellow movie geeks, and enjoy social features such as recommendations. The application is running on Neo4j using Spring Data Neo4j and the well-known Spring Web Stack.

The second part of the book is the classic reference documentation, containing detailed information about the library. It discusses the programming model, the underlying assumptions, and internals, as well as the APIs for the object-graph mapping. The reference documentation is typically used to look up concrete bits of information, or to drill down into certain topics. For hackers wanting to really delve into Spring Data Neo4j, it can of course also be read cover-to-cover.

4. Acknowledgements

We would like to thank everyone who contributed to this book, especially Mark Pollack and Thomas Risberg, the leads of the Spring Data Project, who helped a lot during the development of the library as well as sharing great feedback about the book. Also Oliver Gierke, our local German VMWare/SpringSource engineer, who invested a lot of time discussing various aspects of the library as well as providing the superb foundations for the Spring Data Repositories. We tortured Andy Clement, the AspectJ project lead, with many questions and issues around our advanced AspectJ usage which caused some headaches. He always quickly solved our issues and gave us excellent answers.

Many thanks to our colleagues David Montag, Andreas Kollegger and Rickard Öberg who not only contributed to Spring Data Neo4j but also provided content and feedback for this book.

We also appreciate very much the foresight of Rod Johnson and Emil Eifrem to initiate the project, and now also providing great forewords. Their leadership inspired collaboration between the engineering

teams at SpringSource and Neo Technology, a tremendous help during the making of Spring Data Neo4j.

Last but not least we thank our vibrant community, both in the Spring Forums as well as on the Neo4j Mailing list and on many other places on the internet for giving us feedback, reporting issues and suggesting improvements. Without that important feedback we wouldn't be where we are today. Especially Jean-Pierre Bergamin and Alfredas Chmieliauskas provided exceptional feedback and contributions.

Enjoy the book!

Part I. Tutorial



The first part of the book provides a tutorial that walks through the creation of a complete web application called `cineasts.net`, built with Spring Data Neo4j. Cineasts are people who love movies, and the site is a gathering place for moviegoers. For `cineasts.net` we decided to add a social aspect to the rating of movies, allowing friends to share their scores and get recommendations for new friends and movies.

The tutorial takes the reader through the steps necessary to create the application. It provides the configuration and code examples that are needed to understand what's happening in Spring Data Neo4j. The complete source code for the app is available on [Github](#).

Chapter 1. Introducing our project

Allow me to introduce Cineasts.net

Once upon a time we wanted to build a social movie database. At first there was only the name: Cineasts, the movie enthusiasts who have a burning passion for movies. So we went ahead and bought the domain cineasts.net, and so we were off to a good start.

We had some ideas about the domain model too. There would obviously be actors playing roles in movies. We also needed someone to rate the movies - enter the cineast. And cineasts, being the social people they are, they wanted to make friends with other fellow cineasts. Imagine instantly finding someone to watch a movie with, or share movie preferences with. Even better, finding new friends and movies based on what you and your friends like.

When we looked for possible sources of data, IMDB was our first stop. But they're a bit expensive for our taste, charging \$15k USD for data access. Fortunately, we found themoviedb.org which provides user-generated data for free. They also have liberal terms and conditions, and a nice API for retrieving the data.

We had many more ideas, but we wanted to get something out there quickly. Here is how we envisioned the final website:



Chapter 2. The Spring stack

Being Spring developers, we naturally choose components from the Spring stack to do all the heavy lifting. After all, we have the concept etched out, so we're already halfway there.

What database would fit both the complex network of cineasts, movies, actors, roles, ratings, and friends, while also being able to support the recommendation algorithms that we had in mind? We had no idea.

But hold your horses, there is this new Spring Data project, started in 2010, which brings the convenience of the Spring programming model to NOSQL databases. That should be in line with what we already know, providing us with a quick start. We had a look at the list of projects supporting the different NOSQL databases out there. Only one of them mentioned the kind of social network we were thinking of - Spring Data Neo4j for the Neo4j graph database. Neo4j's slogan of "value in relationships" plus "Enterprise NOSQL" and the accompanying docs looked like what we needed. We decided to give it a try.

2.1. Required setup

To set up the project we created a public Github account and began setting up the infrastructure for a Spring web project using Maven as the build system. So we added the dependencies for the Spring Framework libraries, added the `web.xml` for the `DispatcherServlet`, and the `applicationContext.xml` in the `webapp` directory.

Example 2.1. Project `pom.xml`

```
<properties>
  <spring.version>3.0.7.RELEASE</spring.version>
</properties>

<dependencies>
<dependency>
  <groupId>org.springframework</groupId>
  <!-- abbreviated for all the dependencies -->
  <artifactId>spring-(core,context,aop,aspects,tx,webmvc)</artifactId>
  <version>${spring.version}</version>
</dependency>
<dependency>
  <groupId>org.springframework</groupId>
  <artifactId>spring-test</artifactId>
  <version>${spring.version}</version>
  <scope>test</scope>
</dependency>
</dependencies>
```

Example 2.2. Project web.xml

```

<listener>
  <listener-class>org.springframework.web.context.ContextLoaderListener</listener-class>
</listener>

<servlet>
  <servlet-name>dispatcherServlet</servlet-name>
  <servlet-class>org.springframework.web.servlet.DispatcherServlet</servlet-class>
  <load-on-startup>1</load-on-startup>
</servlet>

<servlet-mapping>
  <servlet-name>dispatcherServlet</servlet-name>
  <url-pattern>/</url-pattern>
</servlet-mapping>

```

With this setup in place we were ready for the first spike: creating a simple MovieController showing a static view. See the Spring Framework documentation for information on doing this.

Example 2.3. applicationContext.xml

```

<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:context="http://www.springframework.org/schema/context"
  xmlns:tx="http://www.springframework.org/schema/tx"
  xsi:schemaLocation="
    http://www.springframework.org/schema/beans
    http://www.springframework.org/schema/beans/spring-beans-3.0.xsd
    http://www.springframework.org/schema/tx
    http://www.springframework.org/schema/tx/spring-tx-3.0.xsd
    http://www.springframework.org/schema/context
    http://www.springframework.org/schema/context/spring-context-3.0.xsd">

  <context:annotation-config/>
  <context:spring-configured/>
  <context:component-scan base-package="org.neo4j.cineasts">
    <context:exclude-filter type="annotation"
      expression="org.springframework.stereotype.Controller"/>
  </context:component-scan>

  <tx:annotation-driven mode="proxy"/>
</beans>

```

Example 2.4. dispatcherServlet-servlet.xml

```

<mvc:annotation-driven/>
<mvc:resources mapping="/images/**" location="/images/">
</mvc:resources>
<mvc:resources mapping="/resources/**" location="/resources/">
</mvc:resources>
<context:component-scan base-package="org.neo4j.cineasts.controller"/>

<bean id="viewResolver"
  class="org.springframework.web.servlet.view.InternalResourceViewResolver"
  p:prefix="/WEB-INF/views/" p:suffix=".jsp"/>


```

We spun up Tomcat in STS with the App and it worked fine. For completeness we also added Jetty to the maven-config and tested it by invoking `mvn jetty:run` to see if there were any obvious issues with the config. It all seemed to work just fine.

Chapter 3. The domain model

Setting the stage

We wanted to outline the domain model before diving into library details. We also looked at the data model of the themoviedb.org data to confirm that it matched our expectations.

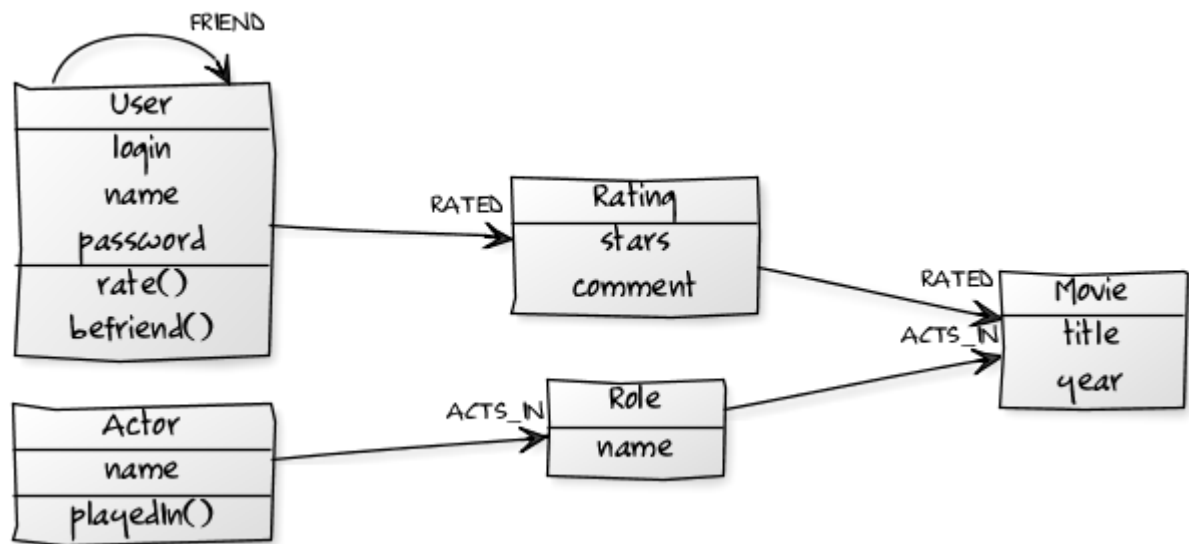

In Java code this looks pretty straightforward:

Example 3.1. Domain model

```
class Movie {
    String id;
    String title;
    int year;
    Set<Role> cast;
}

class Actor {
    String id;
    String name;
    Set<Movie> filmography;
    Role playedIn(Movie movie, String role) { ... }
}

class Role {
    Movie movie;
    Actor actor;
    String role;
}

class User {
    String login;
    String name;
    String password;
    Set<Rating> ratings;
    Set<User> friends;
    Rating rate(Movie movie, int stars, String comment) { ... }
    void befriend(User user) { ... }
}

class Rating {
    User user;
    Movie movie;
    int stars;
    String comment;
}
```

Then we wrote some simple tests to show that the basic design of the domain is good enough so far. Just creating a movie, populating it with actors, and allowing users to rate it.

Chapter 4. Learning Neo4j

Graphs ahead

Now we needed to figure out how to store our chosen domain model in the chosen database. First we read up about graph databases, in particular our chosen one, [Neo4j](#). The Neo4j data model consists of nodes and relationships, both of which can have key/value-style properties. What does that mean, exactly? Nodes are the graph database name for records, with property keys instead of column names. That's normal enough. Relationships are the special part. In Neo4j, relationships are first-class citizens, meaning they are more than a simple foreign-key reference to another record, relationships carry information. So we can link together nodes into semantically rich networks. This really appealed to us. Then we found that we were also able to [index nodes and relationships](#) by {key, value} pairs. We also found that we could traverse relationships both imperatively using the core API, and declaratively using a query-like [Traversal Description](#). Besides those programmatic traversals there was the powerful graph query language called [Cypher](#) and an interesting looking DSL named [Gremlin](#). So lots of ways of working with the graph.

We also learned that Neo4j is fully transactional and therefore upholds [ACID](#) guarantees for our data. Durability is actually a good thing and we didn't have to scale to trillions of users and movies yet. This is unusual for NOSQL databases, but easier for us to get our head around than non-transactional eventual consistency. It also made us feel safe, though it also meant that we had to manage transactions. Something to keep in mind later.

We started out by doing some prototyping with the Neo4j core API to get a feeling for how it works. And also, to see what the domain might look like when it's saved in the graph database. After adding the Maven dependency for Neo4j, we were ready to go.

Example 4.1. Neo4j Maven dependency

```
<dependency>
  <groupId>org.neo4j</groupId>
  <artifactId>neo4j</artifactId>
  <version>1.6</version>
</dependency>
```

Example 4.2. Neo4j core API (transaction code omitted)

```
enum RelationshipTypes implements RelationshipType { ACTS_IN };

GraphDatabaseService gds = new EmbeddedGraphDatabase("/path/to/store");
Node forrest=gds.createNode();
forrest.setProperty("title", "Forrest Gump");
forrest.setProperty("year", 1994);
gds.index().forNodes("movies").add(forrest, "id", 1);

Node tom=gds.createNode();
tom.setProperty("name", "Tom Hanks");

Relationship role=tom.createRelationshipTo(forrest, ACTS_IN);
role.setProperty("role", "Forrest");

Node movie=gds.index().forNodes("movies").get("id", 1).getSingle();
assertEquals("Forrest Gump", movie.getProperty("title"));
for (Relationship role : movie.getRelationships(ACTS_IN, INCOMING)) {
    Node actor=role.getOtherNode(movie);
    assertEquals("Tom Hanks", actor.getProperty("name"));
    assertEquals("Forrest", role.getProperty("role"));
}
```

Chapter 5. Spring Data Neo4j

Conjuring magic

So far it had all been pure Spring Framework and Neo4j. However, using the Neo4j code in our domain classes polluted them with graph database details. For this application, we wanted to keep the domain classes clean. Spring Data Neo4j promised to do the heavy lifting for us, so we continued investigating it.

Spring Data Neo4j comes with two mapping modes. The more powerful one depends heavily on AspectJ, see Chapter 26, *AspectJ details*, so we ignored it for the time being. The simple direct POJO-mapping copies the data out of the graph and into our entities. Good enough for a web-application like ours.

The first step was to configure Maven:

Example 5.1. Spring Data Neo4j Maven configuration

```
<dependency>
  <groupId>org.springframework.data</groupId>
  <artifactId>spring-data-neo4j</artifactId>
  <version>2.0.0.RELEASE</version>
</dependency>
```

The Spring context configuration was even easier, thanks to a provided namespace:

Example 5.2. Spring Data Neo4j context configuration

```
<beans xmlns="http://www.springframework.org/schema/beans" ...
  xmlns:neo4j="http://www.springframework.org/schema/data/neo4j"
  xsi:schemaLocation="... http://www.springframework.org/schema/data/neo4j
    http://www.springframework.org/schema/data/neo4j/spring-neo4j-2.0.xsd">
  ...
  <neo4j:config storeDirectory="data/graph.db"/>
  ...
</beans>
```

Chapter 6. Annotating the domain

Decorations

Looking at the Spring Data Neo4j documentation, we found a simple [Hello World example](#) and tried to understand it. We also spotted a [compact reference card](#) which helped us a lot. The entity classes were annotated with `@NodeEntity`. That was simple, so we added the annotation to our domain classes too. Entity classes representing relationships were instead annotated with `@RelationshipEntity`. Property fields were taken care of automatically. The only additional field we had to provide for all entities was a `id`-field to store the node- and relationship-ids.

Example 6.1. Movie class with annotation

```
@NodeEntity
class Movie {
    @GraphId Long nodeId;
    String id;
    String title;
    int year;
    Set<Role> cast;
}
```

It was time to put our entities to the test. How could we now be assured that an attribute really was persisted to the graph store? We wanted to load the entity and check the attribute. Either we could have a `Neo4jTemplate` injected and use its `findOne(id, type)` method to load the entity. Or use a more versatile `Repository`. The same goes for persisting entities, both `Neo4jTemplate` or the `Repository` could be used. We decided to keep things simple for now.

So here's what our test ended up looking like:

Example 6.2. First test case

```
@Autowired Neo4jTemplate template;

@Test @Transactional public void persistedMovieShouldBeRetrievableFromGraphDb() {
    Movie forrestGump = template.save(new Movie("Forrest Gump", 1994));
    Movie retrievedMovie = template.findOne(forrestGump.getNodeId(), Movie.class);
    assertEquals("retrieved movie matches persisted one", forrestGump, retrievedMovie);
    assertEquals("retrieved movie title matches", "Forrest Gump", retrievedMovie.getTitle());
}
```

As Neo4j is transactional, we have to provide the transactional boundaries for mutating operations.

Chapter 7. Indexing

Do I know you?

There is an `@Indexed` annotation for fields. We wanted to try this out, and use it to guide the next test. We added `@Indexed` to the `id` field of the `Movie` class. This field is intended to represent the external ID that will be used in URIs and will be stable across database imports and updates. This time we went with a simple `GraphRepository` to retrieve the indexed movie.

Example 7.1. Exact Indexing for Movie id

```
@NodeEntity class Movie {
    @Indexed String id;
    String title;
    int year;
}

@Autowired Neo4jTemplate template;

@Test @Transactional
public void persistedMovieShouldBeRetrievableFromGraphDb() {
    int id = 1;
    Movie forrestGump = template.save(new Movie(id, "Forrest Gump", 1994));
    GraphRepository<Movie> movieRepository =
        template.repositoryFor(Movie.class);
    Movie retrievedMovie = movieRepository.findByPropertyValue("id", id);
    assertEquals("retrieved movie matches persisted one", forrestGump, retrievedMovie);
    assertEquals("retrieved movie title matches", "Forrest Gump", retrievedMovie.getTitle());
}
```

Chapter 8. Repositories

Serving a good cause

We wanted to add repositories with domain-specific operations. Interestingly there was support for a very advanced repository infrastructure. You just declare an entity specific repository interface and get all commonly used methods for free without implementing any of boilerplate code.

So we started by creating a movie-related repository, simply by creating an empty interface.

Example 8.1. Movie repository

```
package org.neo4j.cineasts.repository;  
public interface MovieRepository extends GraphRepository<Movie> {}
```

Then we enabled repository support in the Spring context configuration by simply adding:

Example 8.2. Repository context configuration

```
<neo4j:repositories base-package="org.neo4j.cineasts.repository"/>
```

Besides the existing repository operations (like CRUD, and many standard queries) it was possible to declare custom methods, which we explored later. Those methods' names could be more domain centric and expressive than the generic operations. For simple use-cases like finding by id's this is good enough. So we first let Spring autowire our `MovieController` with the `MovieRepository`. That way we could perform simple persistence operations.

Example 8.3. Usage of a repository

```
@Autowired MovieRepository repo;  
...  
Movie movie = repo.findByPropertyValue("id",movieId);
```

We went on exploring the repository infrastructure. A very cool feature was something that we so far only heard about from Grails developers. Deriving queries from method names. Impressive! So we had a more explicit method for the id lookup.

Example 8.4. Derived movie-repository query method

```
public interface MovieRepository extends GraphRepository<Movie> {  
    Movie getMovieById(String id);  
}
```

In our wildest dreams we imagined the method names we would come up with, and what kinds of queries those could generate. But some, more complex queries would be cumbersome to read and write. So in those cases it is better to just annotate the finder method. We did this much later, and just wanted to give you a peek into the future. There is much more, you can do with repositories, it is worthwhile to explore.

Example 8.5. Annotated movie-repository query method

```
public interface MovieRepository extends GraphRepository<Movie> {  
    @Query("start user=node:User({0}) match user-[r:RATED]->movie return movie order by r.stars desc limit 10")  
    Iterable<Movie> getTopRatedMovies(User user);  
}
```

Chapter 9. Relationships

A convincing act

Our application was not very much fun yet, just storing movies and actors. After all, the power is in the relationships between them. Fortunately, Neo4j treats relationships as first class citizens, allowing them to be addressed individually and have properties assigned to them. That allows for representing them as entities if needed.

9.1. Creating relationships

Relationships without properties ("anonymous" relationships) don't require any `@RelationshipEntity` classes. "Unfortunately" we had none of those, because our relationships were richer. Therefore we went with the `Role` relationship between `Movie` and `Actor`. It had to be annotated with `@RelationshipEntity` and the `@StartNode` and `@EndNode` had to be marked. So our `Role` looked like this:



Example 9.1. Role class

```
@RelationshipEntity
class Role {
    @StartNode Actor actor;
    @EndNode Movie movie;
    String role;
}
```

When writing a test for the `Role` we tried to create the relationship entity just by instantiating it with `new` and saving it with the template, but we got an exception saying that it misses the relationship-type.

We had to add it to the `@RelationshipEntity` as an attribute (or as a `@RelationshipType` annotated field in the `RelationshipEntity`). Another way to create instances of relationship-entities is to use the methods provided by the template, like `createRelationshipBetween`.

Example 9.2. Relating actors to movies

```

@RelationshipEntity(type="ACTS_IN")
class Role {
    @StartNode Actor actor;
    @EndNode Movie movie;
    String role;
}
class Actor {
    ...
    public Role playedIn(Movie movie, String roleName) {
        Role role = new Role(this, movie, roleName);
        this.roles.add(role);
        return role;
    }
}

Role role = tomHanks.playedIn(forrestGump, "Forrest Gump");

// either save the actor
template.save(tomHanks);
// or the role
template.save(role);

// alternative approach
Role role = template.createRelationshipBetween(actor, movie,
        Role.class, "ACTS_IN");

```

Saving just the actor would take care of relationships with the same type between two entities and remove the duplicates. Whereas just saving the role happily creates another relationship with the same type.

9.2. Accessing related entities

Now we wanted to find connected entities. We already had fields for the relationships in both classes. It was time to annotate them correctly. The Neo4j relationship type and direction were easy to figure out. The direction even defaulted to outgoing, so we only had to specify it for the movie. If we want to use the same relationship between the two entities we have to make sure to provide a dedicated type, otherwise the field-names would be used resulting in different relationships.

Example 9.3. @RelatedTo usage

```

@NodeEntity
class Movie {
    @Indexed int id;
    String title;
    int year;
    @RelatedTo(type = "ACTS_IN", direction = Direction.INCOMING)
    Set<Actor> cast;
}

@NodeEntity
class Actor {
    @Indexed int id;
    String name;
    @RelatedTo(type = "ACTS_IN")
    Set<Movie> movies;

    public Role playedIn(Movie movie, String roleName) {
        return new Role(this, movie, roleName);
    }
}

```

Changes to the collections of related entities are reflected into the graph on saving of the entity.

We made sure to add some tests for using the relationships, so we were assured that the collections worked as advertised.

9.3. Accessing the relationship entities

But we still couldn't access the Role relationship entities themselves. It turned out that there was a separate annotation `@RelatedToVia` for accessing the actual relationship entities. And we could declare the field as an `Iterable<Role>`, with read-only semantics or on a `Collection` or `Set<Role>` field with modifying semantics. So off we went, creating our first real relationship (just kidding).

To have the collections of relationships being read eagerly during the loading of the Movie we have to annotate it with the `@Fetch` annotation. Otherwise Spring Data Neo4j refrains from following relationships automatically. The risk of loading the whole graph into memory would be too high.

Example 9.4. @RelatedToVia usage

```

@NodeEntity
class Movie {
    @Indexed int id;
    String title;
    int year;

    @Fetch @RelatedToVia(type = "ACTS_IN", direction = Direction.INCOMING)
    Iterable<Roles> roles;
}

```

After watching the tests pass, we were confident that the changes to the relationship fields were really stored to the underlying relationships in the graph. We were pretty satisfied with persisting our domain.

Chapter 10. Get it running

Curtains up!

Now we had a pretty complete application. It was time to put it to the test.

10.1. Populating the database

Before we opened the gates we needed to add some movie data. So we wrote a small class for populating the database which could be called from our controller. To make it safe to call several times we added index lookups to check for existing entries. A simple `/populate` endpoint for the controller that called it would be enough for now.

Example 10.1. Populating the database - Controller

```
@Service
public class DatabasePopulator {

    @Transactional
    public List<Movie> populateDatabase() {
        Actor tomHanks = new Actor("1", "Tom Hanks");
        Movie forrestGump = new Movie("1", "Forrest Gump");
        tomHanks.playedIn(forrestGump, "Forrest");
        template.save(forrestGump);
        return asList(forrestGump);
    }
}

@Controller
public class MovieController {

    @Autowired private DatabasePopulator populator;

    @RequestMapping(value = "/populate", method = RequestMethod.POST)
    public String populateDatabase(Model model) {
        Collection<Movie> movies = populator.populateDatabase();
        model.addAttribute("movies", movies);
        return "/movies/list";
    }
}
```


Accessing the URI we could see the list of movies we had added.

10.2. Inspecting the datastore

Being the geeks we are, we also wanted to inspect the raw data in the database. Reading the [Neo4j docs](#), there were a couple of different ways of going about this.

10.2.1. Neoclipse visualization

First we tried Neoclipse, an Eclipse RCP application/plugin that opens an existing graph store and visualizes its content. After getting an exception about concurrent access, we learned that we have to use Neoclipse in read-only mode when our webapp was still running. Good to know.

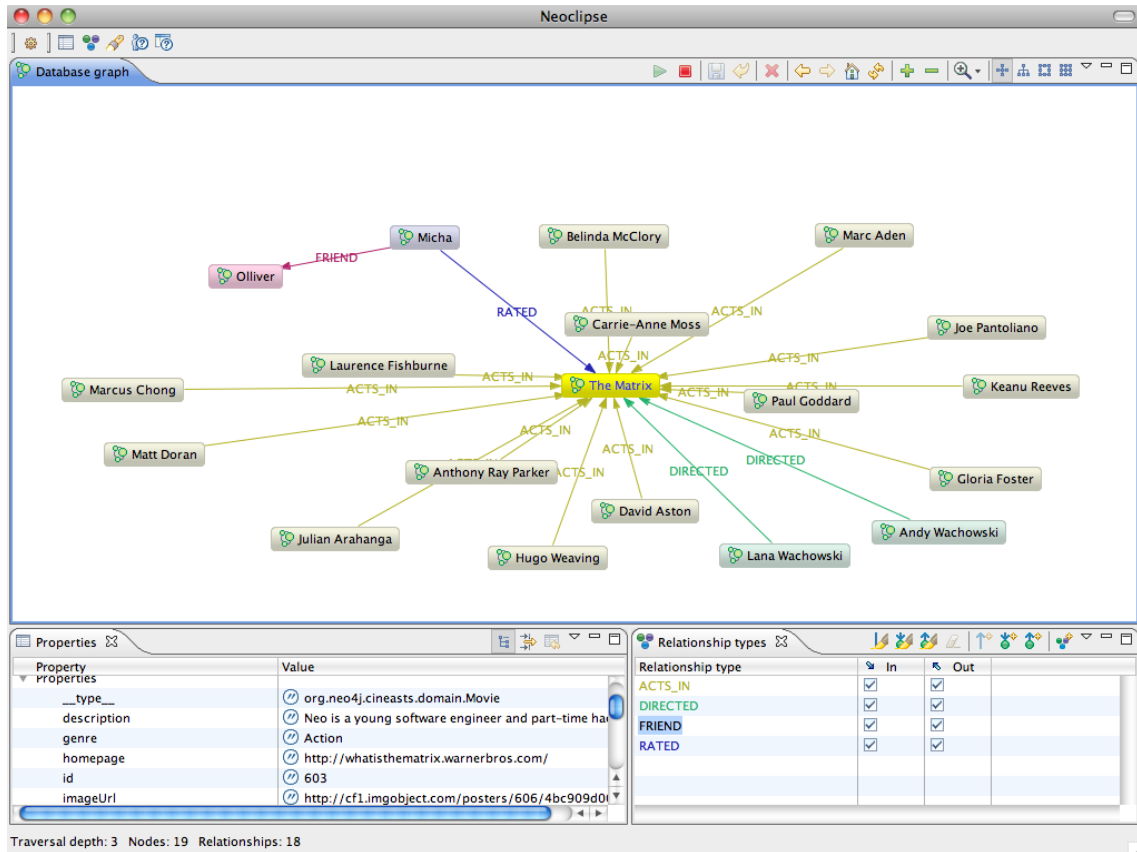

10.2.2. The Neo4j Shell

For console junkies there was also a shell that was able to connect to a running Neo4j instance (if it was started with the `enable_remote_shell=true` parameter), or reads an existing graph store directly.

Example 10.2. Starting the Neo4j Shell

```
bash# neo4j-shell -readonly -path data/graph.db
bash# neo4j-shell -readonly -port 1337
```

The shell was very similar to a standard Bash shell. We were able to `cd` to between the nodes, and `ls` the relationships and properties. There were also more advanced commands for indexing, queries and traversals.

Example 10.3. Neo4j Shell usage

```

neo4j-sh[readonly] (0)$ help
Available commands: index dbinfo ls rm alias set eval mv gsh env rmrel mkrel
                    trav help pwd paths ... man cd
Use man <command> for info about each command.

neo4j-sh[readonly] (0)$ index --cd -g User login micha

neo4j-sh[readonly] (Micha,1)$ ls
*__type__  =[org.neo4j.cineasts.domain.User]
*login     =[micha]
*name      =[Micha]
*roles     =[ROLE_ADMIN,ROLE_USER]
(me) --[FRIEND]-> (Olliver,2)
(me) --[RATED]-> (The Matrix,3)

neo4j-sh[readonly] (Micha,1)$ ls 2
*__type__  =[org.neo4j.cineasts.domain.User]
*login     =[ollie]
*name      =[Olliver]
*roles     =[ROLE_USER]
(Olliver,2) <-[FRIEND]-- (me)

neo4j-sh[readonly] (Micha,1)$ cd 3

neo4j-sh[readonly] (The Matrix,3)$ ls
*__type__      =[org.neo4j.cineasts.domain.Movie]
*description   =[Neo is a young software engineer and part-time hacker who is singled ...]
*genre         =[Action]
*homepage      =[http://whatisthematrix.warnerbros.com/]
...
*studio        =[Warner Bros. Pictures]
*tagline       =[Welcome to the Real World.]
*title         =[The Matrix]
*trailer       =[http://www.youtube.com/watch?v=UM5yepZ21pI]
*version       =[324]
(me) <-[ACTS_IN]-- (Marc Aden,19)
(me) <-[ACTS_IN]-- (David Aston,18)
...
(me) <-[ACTS_IN]-- (Keanu Reeves,6)
(me) <-[DIRECTED]-- (Andy Wachowski,5)
(me) <-[DIRECTED]-- (Lana Wachowski,4)
(me) <-[RATED]-- (Micha,1)

```

Chapter 11. Web views

Showing off

After having put some data in the graph database, we also wanted to show it to the user. Adding the controller method to show a single movie with its attributes and cast in a JSP was straightforward. It basically just involved using the repository to look the movie up and add it to the model, and then forwarding to the `/movies/show` view and voilà.

Example 11.1. Controller for showing movies


```
@RequestMapping(value = "/movies/{movieId}",
method = RequestMethod.GET, headers = "Accept=text/html")
public String singleMovieView(final Model model, @PathVariable String movieId) {
    Movie movie = repository.findById(movieId);
    model.addAttribute("id", movieId);
    if (movie != null) {
        model.addAttribute("movie", movie);
        model.addAttribute("stars", movie.getStars());
    }
    return "/movies/show";
}
```

Example 11.2. Populating the database - JSP `/movies/show`

```
<%@ page session="false" %>
<%@ taglib uri="http://www.springframework.org/tags" prefix="s" %>
<%@ taglib prefix="c" uri="http://java.sun.com/jsp/jstl/core" %>

<c:choose>
    <c:when test="${not empty movie}">
        <h2>${movie.title} (${stars} Stars)</h2>
        <c:if test="${not empty movie.roles}">
            <ul>
                <c:forEach items="${movie.roles}" var="role">
                    <li>
                        <a href="/actors/${role.actor.id}"><c:out value="${role.actor.name}" /> as
                        <c:out value="${role.name}" /></a><br/>
                    </li>
                </c:forEach>
            </ul>
        </c:if>
    </c:when>
    <c:otherwise>
        No Movie with id ${id} found!
    </c:otherwise>
</c:choose>
```

The UI had now evolved to this:

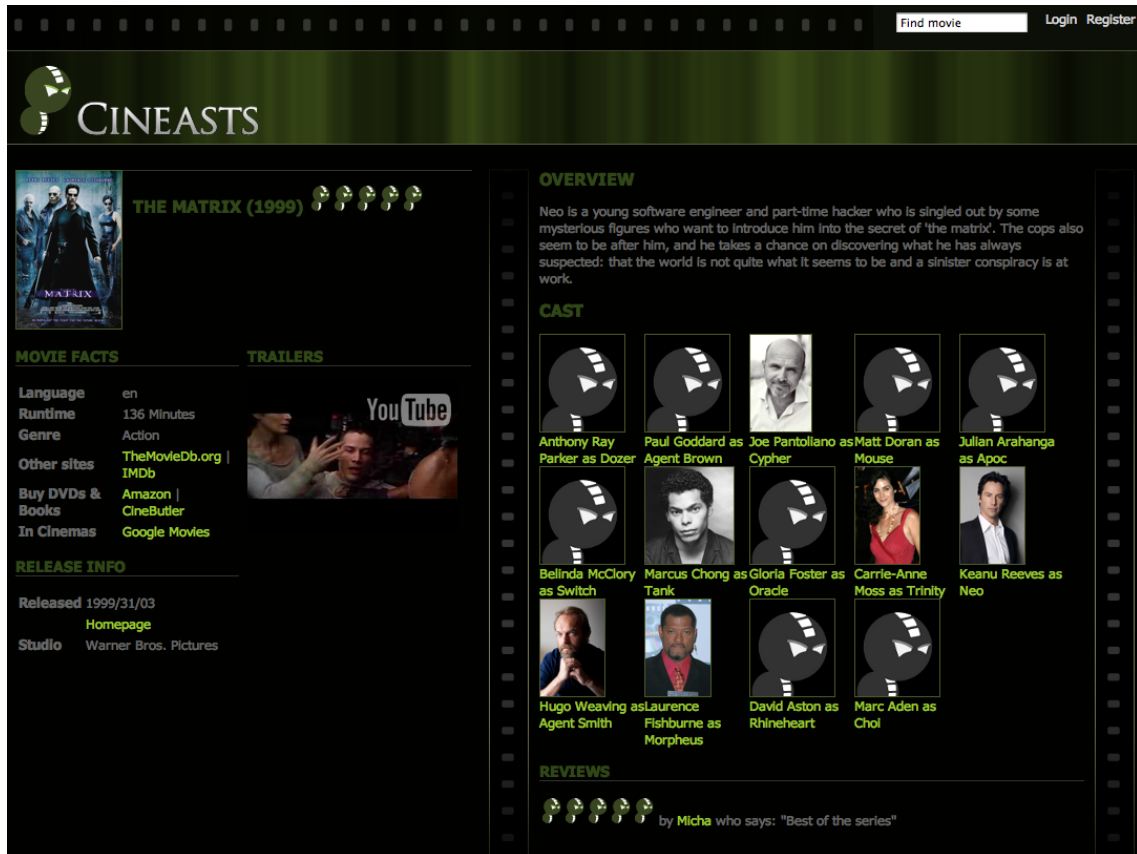

11.1. Searching

The next thing was to allow users to search for movies, so we needed some fulltext search capabilities. As the default index provider implementation of Neo4j is based on [Apache Lucene](#), we were delighted to see that fulltext indexes were supported out of the box.

We happily annotated the title field of the Movie class with `@Indexed(type = FULLTEXT)`. Next thing we got an exception telling us that we had to specify a separate index name. So we simply changed it to `@Indexed(type = FULLTEXT, indexName = "search")`.

With derived finder methods, finding things became easy. By simply declaring a finder-method name that expressed the required properties, it worked without annotations. Cool stuff and you could even tell it that it should return pages of movies, its size and offset specified by a `Pageable` which also contains sort information. Using the `like` operator indicates that fulltext search should be used, instead of an exact search.

Example 11.3. Searching for movies

```
public interface MovieRepository ... {
    Movie findById(String id);
    Page<Movie> findByTitleLike(String title, Pageable page);
}
```

11.2. Listing results

We then used this result in the controller to render a page of movies, driven by a search box. The movie properties and the cast were accessible through the getters in the domain classes.

Example 11.4. Search controller

```

@RequestMapping(value = "/movies",
method = RequestMethod.GET, headers = "Accept=text/html")
public String findMovies(Model model, @RequestParam("q") String query) {
    Page<Movie> movies = repository.findByTitleLike(query, new PageRequest(0,20));
    model.addAttribute("movies", movies);
    model.addAttribute("query", query);
    return "/movies/list";
}

```

Example 11.5. Search Results JSP

```

<h2>Movies</h2>

<c:choose>
    <c:when test="${not empty movies}">
        <dl class="listings">
            <c:forEach items="${movies}" var="movie">
                <dt>
                    <a href="/movies/${movie.id}"><c:out value="${movie.title}" /></a><br/>
                </dt>
                <dd>
                    <c:out value="${movie.description}" escapeXml="true" />
                </dd>
            </c:forEach>
        </dl>
    </c:when>
    <c:otherwise>
        No movies found for query &quot;${query}&quot;;.
    </c:otherwise>
</c:choose>

```

The UI now looked like this:

Find movie

MichaLogout

CINEASTS

RESULTS FOR "MATRIX"



The Matrix★★★★★

Welcome to the Real World.



The Matrix Reloaded

Free your mind.



The Matrix Revolutions

Everything that has a beginning has an end.

Chapter 12. Adding social

Movies 2.0

So far, the website had only been a plain old movie database. We now wanted to add a touch of social to it.

12.1. Users

So we started out by taking the `User` class that we'd already coded and made it a full-fledged Spring Data Neo4j entity. We added the ability to create friends and to rate movies. With that we also added a simple `UserRepository` that was able to look up users by ID.

The relationships of the user are his friends and the movie-ratings which is implemented with a `Rating` Relationship-Entity. This time we used a different approach (for educational and curiosity purposes) to create the `Rating` relationships. The `createRelationshipBetween` operation of the `Neo4jTemplate` was our matchmaker of choice.

Example 12.1. Social entities

```
@NodeEntity
class User {
    @Indexed String login;
    String name;
    String password;

    @RelatedToVia(type = RATED)
    @Fetch Set<Rating> ratings;

    @RelatedTo(type = "FRIEND", direction=Direction.BOTH)
    @Fetch Set<User> friends;

    public Rating rate(Neo4jOperations template, Movie movie, int stars, String comment) {
        final Rating rating = template.createRelationshipBetween(this, movie, Rating.class, RATED, false);
        rating.rate(stars, comment);
        return template.save(rating);
    }

    public void addFriend(User user) {
        this.friends.add(user);
    }
}

@RelationshipEntity
class Rating {
    @StartNode User user;
    @EndNode Movie movie;
    int stars;
    String comment;
    public Rating(int stars, String comment) {
        this.stars = stars; this.comment = comment;
        return this;
    }
}
```

We extended the `DatabasePopulator` to add some users and ratings to the initial setup.

Example 12.2. Populate users and ratings

```

@Transactional
public List<Movie> populateDatabase() {
    Actor tomHanks = new Actor("1", "Tom Hanks");
    Movie forestGump = new Movie("1", "Forrest Gump");
    tomHanks.playedIn(forestGump, "Forrest");
    template.save(tomHanks);

    User me = template.save(new User("micha", "Micha", "password"));
    Rating awesome = me.rate(template, forestGump, 5, "Awesome");

    User ollie = template.save(new User("ollie", "Oliver", "password"));
    ollie.rate(template, forestGump, 2, "ok");
    me.addFriend(ollie);
    template.save(me);
    return asList(forestGump);
}

```

12.2. Ratings for movies

We also put a ratings field into the Movie class to be able to get a movie's ratings, and also a method to average its star rating.

Example 12.3. Getting the rating of a movie

```

class Movie {
    ...

    @RelatedToVia(type="RATED", direction = Direction.INCOMING)
    @Fetch Iterable<Rating> ratings;

    public int getStars() {
        int stars = 0, count = 0;
        for (Rating rating : ratings) {
            stars += rating.getStars(); count++;
        }
        return count == 0 ? 0 : stars / count;
    }
}

```

Fortunately our tests highlighted the division by zero error when calculating the stars for a movie without ratings. The next steps were to add this information to the movie presentation in the UI, and creating a user profile page. But for that to happen, users must first be able to log in.

Chapter 13. Adding Security

Protecting assets

To handle an active user in the webapp we had to put it in the session and add login and registration pages. Of course the pages that were only meant for logged-in users had to be secured as well.

Being Spring users, we naturally used Spring Security for this. We wrote a simple `UserDetailsService` by extending a repository with a custom implementation that takes care of looking up the users and validating their credentials. The config is located in a separate `applicationContext-security.xml`. But first, as always, Maven and `web.xml` setup.

Example 13.1. Spring Security pom.xml

```
<dependency>
  <groupId>org.springframework.security</groupId>
  <artifactId>spring-security-web</artifactId>
  <version>${spring.version}</version>
</dependency>
<dependency>
  <groupId>org.springframework.security</groupId>
  <artifactId>spring-security-config</artifactId>
  <version>${spring.version}</version>
</dependency>
```

Example 13.2. Spring Security web.xml

```
<context-param>
  <param-name>contextConfigLocation</param-name>
  <param-value>
    /WEB-INF/applicationContext-security.xml
    /WEB-INF/applicationContext.xml
  </param-value>
</context-param>

<listener>
  <listener-class>org.springframework.web.context.ContextLoaderListener</listener-class>
</listener>

<filter>
  <filter-name>springSecurityFilterChain</filter-name>
  <filter-class>org.springframework.web.filter.DelegatingFilterProxy</filter-class>
</filter>

<filter-mapping>
  <filter-name>springSecurityFilterChain</filter-name>
  <url-pattern>/*</url-pattern>
</filter-mapping>
```

Example 13.3. Spring Security applicationContext-security.xml

```
<security:global-method-security secured-annotations="enabled">
</security:global-method-security>

<security:http auto-config="true" access-denied-page="/auth/denied">
  <security:intercept-url pattern="/admin/*" access="ROLE_ADMIN"/>
  <security:intercept-url pattern="/import/*" access="ROLE_ADMIN"/>
  <security:intercept-url pattern="/user/*" access="ROLE_USER"/>
  <security:intercept-url pattern="/auth/login" access="IS_AUTHENTICATED_ANONYMOUSLY"/>
  <security:intercept-url pattern="/auth/register" access="IS_AUTHENTICATED_ANONYMOUSLY"/>
  <security:intercept-url pattern="/**" access="IS_AUTHENTICATED_ANONYMOUSLY"/>
  <security:form-login login-page="/auth/login"
    authentication-failure-url="/auth/login?login_error=true"
    default-target-url="/user"/>
  <security:logout logout-url="/auth/logout" logout-success-url="/" invalidate-session="true"/>
</security:http>

<security:authentication-manager>
  <security:authentication-provider user-service-ref="userRepository">
    <security:password-encoder hash="md5">
      <security:salt-source system-wide="cewuiqwzie"/>
    </security:password-encoder>
  </security:authentication-provider>
</security:authentication-manager>
```

Example 13.4. CineastsUserDetailsService interface and UserRepository custom implementation

```

public interface CineastsUserDetailsService extends UserDetailsService {
    @Override
    CineastsUserDetails loadUserByUsername(String login)
        throws UsernameNotFoundException, DataAccessException;

    User getUserFromSession();

    @Transactional
    Rating rate(Movie movie, User user, int stars, String comment);

    @Transactional
    User register(String login, String name, String password);

    @Transactional
    void addFriend(String login, final User userFromSession);
}

public interface UserRepository extends GraphRepository<User>,
    RelationshipOperationsRepository<User>,
    CineastsUserDetailsService {

    User findByLogin(String login);
}

public class UserRepositoryImpl implements CineastsUserDetailsService {

    @Autowired private Neo4jOperations template;

    @Override
    public CineastsUserDetails loadUserByUsername(String login)
        throws UsernameNotFoundException, DataAccessException {
        final User user = findByLogin(login);
        if (user==null) throw
            new UsernameNotFoundException("Username not found: "+login);
        return new CineastsUserDetails(user);
    }

    private User findByLogin(String login) {
        return template.lookup(User.class, "login", login)
            .to(User.class).single();
    }

    @Override
    public User getUserFromSession() {
        SecurityContext context = SecurityContextHolder.getContext();
        Authentication authentication = context.getAuthentication();
        Object principal = authentication.getPrincipal();
        if (principal instanceof CineastsUserDetails) {
            CineastsUserDetails userDetails = (CineastsUserDetails) principal;
            return userDetails.getUser();
        }
        return null;
    }
}

public class CineastsUserDetails implements UserDetails {
    private final User user;

    public CineastsUserDetails(User user) {
        this.user = user;
    }

    @Override
    public Collection<GrantedAuthority> getAuthorities() {
        User.Roles[] roles = user.getRoles();
        if (roles ==null) return Collections.emptyList();
        return Arrays.<GrantedAuthority>asList(roles);
    }
}

```

Any logged-in user was now available in the session, and could be used for all the social interactions. The remaining work for this was mainly adding controller methods and JSPs for the views. We used the helper method `getUserFromSession()` in the controllers to access the logged-in user and put it in the model for rendering. Here's what the UI had evolved to:



Chapter 14. More UI

Oh the glamour

To create a nice user experience, we wanted to have a nice looking app. Not something that looked like a toddler made it. So we got some user experience people involved and the results were impressive. This sections presents some of the remaining screen shots of Cineasts.net.



Find movie

THE MATRIX (1999)

MOVIE FACTS

Language: en
 Runtime: 136 Minutes
 Genre: Action
 Other sites: [TheMovieDb.org](#) | [IMDb](#)
 Buy DVDs & Books: [Amazon](#) | [CineButler](#)
 In Cinemas: [Google Movies](#)

TRAILERS

RELEASE INFO

Released: 1999/31/03
[Homepage](#)
 Studio: Warner Bros. Pictures

OVERVIEW

Neo is a young software engineer and part-time hacker who is singled out by some mysterious figures who want to introduce him into the secret of 'the matrix'. The cops also seem to be after him, and he takes a chance on discovering what he has always suspected: that the world is not quite what it seems to be and a sinister conspiracy is at work.

CAST

REVIEWS

by Micha who says: "Best of the series"

Find movie

KEANU REEVES

Born 1964/02/09 in Beirut, Lebanon.

BIOGRAPHY

Keanu Reeves was born on the 2nd of September, 1964 in Beirut, Lebanon. Son of Patricia Bond, a costume designer/performer, and Samuel Nowlin Reeves, Jr., a geologist. Reeves's mother is English, and his father is an American of Hawaiian, Chinese, Portuguese and English descent. Reeves's mother was working in Beirut when she met his father. Reeves' father worked as an unskilled laborer and earned his GED while imprisoned in Hawaii for selling heroin at Hilo International Airport. He abandoned hi

ROLES

The Matrix as Neo in 1999
 The Matrix Revolutions as Neo in 2003
 The Matrix Reloaded as Neo in 2003

Chapter 15. Importing Data

The dusty archives

It was now time to pull the data from themoviedb.org. Registering there and getting an API key was simple, as was using the API on the command-line with `curl`. Looking at the JSON returned for movies and people, we decided to enhance our domain model and add some more fields to enrich the UI.

Example 15.1. JSON movie response

```
[{"popularity":3,
"translated":true, "adult":false, "language":"en",
"original_name":["Rec"], "name":["Rec"], "alternative_name":["REC"],
"movie_type":"movie",
"id":8329, "imdb_id":"tt1038988", "url":"http://www.themoviedb.org/movie/8329",
"votes":11, "rating":7.2,
"status":"Released",
"tagline":"One Witness. One Camera",
"certification":"R",
"overview":"\"REC\" turns on a young TV reporter and her cameraman who cover the night shift at the local fire station...",
"keywords":["terror", "lebende leichen", "obsession", "camcorder", "firemen", "reality tv ", "bite", "cinematographer",
"attempt to escape", "virus", "lodger", "live-reportage", "schwerverletzt"],
"released":"2007-08-29",
"runtime":78,
"budget":0,
"revenue":0,
"homepage":"http://www.3l-filmverleih.de/rec",
"trailer":"http://www.youtube.com/watch?v=YQUkX_XowqI",
"genres":[{"type":"genre",
"url":"http://themoviedb.org/genre/horror",
"name":"Horror",
"id":27}],
"studios":[{"url":"http://www.themoviedb.org/company/2270", "name":"Filmax Group", "id":2270}],
"languages_spoken":[{"code":"es", "name":"Spanish", "native_name":"Espa\u00f1ol"}],
"countries":[{"code":"ES", "name":"Spain", "url":"http://www.themoviedb.org/country/es"}],
"posters":[{"image":{"type":"poster",
"size":"original", "height":1000, "width":706,
"url":"http://cf1.imgobject.com/posters/3a0/4cc8df415e73d650240003a0/rec-original.jpg",
"id":"4cc8df415e73d650240003a0"}},
....
"cast":[{"name":"Manuela Velasco",
"job":"Actor", "department":"Actors",
"character":"Angela Vidal",
"id":34793, "order":0, "cast_id":1,
"url":"http://www.themoviedb.org/person/34793",
"profile":"http://cf1.imgobject.com/profiles/390/.../manuela-velasco-thumb.jpg"},
...
{"name":"Gl\u00f2ria Viguer",
"job":"Costume Design", "department":"Costume \u0026 Make-Up",
"character":"","
"id":54531, "order":0, "cast_id":21,
"url":"http://www.themoviedb.org/person/54531",
"profile":""}],
"version":150, "last_modified_at":"2011-02-20 23:16:57"]}]
```

Example 15.2. JSON actor response

```
[{"popularity":3,
"name":"Glenn Strange", "known_as":[{"name":"George Glenn Strange"}, {"name":"Glen Strange"},
{"name":"Glen 'Peewee' Strange"}, {"name":"Peewee Strange"}, {"name":"'Peewee' Strange"}]},
"id":30112,
"biography":"","
"known_movies":4,
"birthday":"1899-08-16", "birthplace":"Weed, New Mexico, USA",
"url":"http://www.themoviedb.org/person/30112",
"filmography":[{"name":"Bud Abbott Lou Costello Meet Frankenstein",
"id":3073,
"job":"Actor", "department":"Actors",
"character":"The Frankenstein Monster",
"cast_id":23,
"url":"http://www.themoviedb.org/movie/3073",
"poster":"http://cf1.imgobject.com/posters/4ca/.../bud-abbott-lou-costello-meet-frankenstein-cover.jpg",
"adult":false, "release":"1948-06-15"},
...],
"profile":[],
"version":19, "last_modified_at":"2011-03-07 13:02:35"}]
```

For the import process we created a separate importer using Jackson (a JSON library) to fetch and parse the data, and then some transactional methods in the `MovieDbImportService` to actually import it as movies, roles, and actors. The importer used a simple caching mechanism to keep downloaded actor and movie data on the filesystem, so that we didn't have to overload the remote API. In the code below you can see that we've changed the actor to a person so that we can also accommodate the other folks that participate in movie production.

Example 15.3. Importing the data

```

@Transactional
public Movie importMovie(String movieId) {
    Movie movie = movieRepository.findById(movieId);
    if (movie == null) { // Not found: Create fresh
        movie = new Movie(movieId,null);
    }

    Map data = loadMovieData(movieId);
    if (data.containsKey("not_found")) throw
        new RuntimeException("Data for Movie "+movieId+" not found.");
    movieDbJsonMapper.mapToMovie(data, movie);
    movieRepository.save(movie);
    relatePersonsToMovie(movie, data);
    return movie;
}

private void relatePersonsToMovie(Movie movie, Map data) {
    Collection<Map> cast = (Collection<Map>) data.get("cast");
    for (Map entry : cast) {
        String id = "" + entry.get("id");
        String jobName = (String) entry.get("job");
        Roles job = movieDbJsonMapper.mapToRole(jobName);
        if (job==null) {
            continue;
        }
        switch (job) {
            case DIRECTED:
                final Director director = doImportPerson(id, new Director(id));
                director.directed(movie);
                directorRepository.save(director);
                break;
            case ACTS_IN:
                final Actor actor = doImportPerson(id, new Actor(id));
                actor.playedIn(movie, (String) entry.get("character"));
                actorRepository.save(actor);
                break;
        }
    }
}

public void mapToMovie(Map data, Movie movie) {
    movie.setTitle((String) data.get("name"));
    movie.setLanguage((String) data.get("language"));
    movie.setTagline((String) data.get("tagline"));
    movie.setReleaseDate(toDate(data, "released", "yyyy-MM-dd"));
    ...
    movie.setImageUrl(selectImageUrl((List<Map>) data.get("posters"), "poster", "mid"));
}

```

The last part involved adding a protected URI to the MovieController to allow importing ranges of movies. During testing, it became obvious that the calls to themoviedb.org were a limiting factor. As soon as the data was stored locally, the Neo4j import was a sub-second deal.

Chapter 16. Recommendations

Movies! Friends! Bargains!

In the last part of this exercise we wanted to add recommendations to the app. One obvious recommendation was movies that our friends liked.

There was this query language called Cypher that looked a bit like SQL but expressed graph matching queries. So we gave it a try, using the `neo4j-shell`, to incrementally expand the query, just by declaring what relationships we wanted to be taken into account and which properties of nodes and relationships to filter and sort on.

Example 16.1. Cypher based movie recommendation on Repository

```
interface MovieRepository extends GraphRepository<Movie> {
    @Query("
        start user=node({0})
        match user-[:FRIEND]-friend-[r:RATED]->movie
        return movie
        order by avg(r.stars) desc, count(*) desc
        limit 10
    ")
    Iterable<Movie> recommendMovies(User me);
}
```

But we didn't have enough friends, so it was time to get some suggested. That would be like-minded cineasts that rated movies similarly to us. Again Cypher to the rescue, this time only a bit more complex. Something that became obvious with both queries is that graph queries are always local, so they start from a node, or set of nodes or relationships, and then expand outwards from there.

Example 16.2. Cypher - Friend Recommendation on Repository

```
interface UserRepository extends GraphRepository<User> {
    @Query("
        start user=node({0})
        match user-[r:RATED]->movie<-[r2:RATED]-likeminded,
              user-[:FRIEND]-friend
        where r.stars > 3 and r2.stars >= 3
        return likeminded
        order by count(*) desc
        limit 10
    ")
    Iterable<User> suggestFriends(User me);
}
```

The controllers simply called these methods, added their results to the model, and the view rendered the recommendations alongside the user's own ratings.

Chapter 17. Neo4j Server

Remotely related

Right now our application was running with the embedded mode of Neo4j which was fine and highly performant. In certain environments you don't have the luxury of file-system access for your webapps and have to talk to a remote database service instead. Neo4j can also run as a server. It exposes its operations via a HTTP based REST API.

We decided to have a look, to be at least knowledgeable about this deployment scenario. We were aware of the difference of local, in-memory calls and higher latency network hops. That would be something we would also take into careful consideration.

17.1. Getting Neo4j-Server

Getting the Neo4j-Server was easy, we just went to neo4j.org and downloaded the latest version. Starting it on the command-line (or installing it as a service) was a no-brainer as well.

We copied our store-directory into the `data/graph.db` directory of the server and started it up again. The admin console of Neo4j-Server, called 'web-admin' is pretty. Using JavaScript, it renders the graph visually in a highly configurable way. It also gave us the possibility to issue queries over a console, another handy feature.

So, how would we get our app connected to this server? It turned out the changes in configuration and setup were minimal. Spring Data Neo4j already came with a module that took care of the remote protocol. We added that maven dependency and changed the graph database used in the Spring Configuration.

Example 17.1. Maven Dependency

```
<dependency>
  <groupId>org.springframework.data</groupId>
  <artifactId>spring-data-neo4j-rest</artifactId>
  <version>2.0.0.RELEASE</version>
</dependency>
```

Example 17.2. Spring Config

```
<neo4j:config graphDatabaseService="graphDatabaseService"/>
<bean id="graphDatabaseService"
  class="org.springframework.data.neo4j.rest.SpringRestGraphDatabase">
  <constructor-arg index="0" value="http://localhost:7474/db/data" />
</bean>
```

After those two changes we restarted the app, and ... it worked. The transparent handling of the remote API was impressive. We learned that it uses a library called [java-rest-binding](#) under the hood which is also usable without the Spring Framework.

Of course we noticed performance implications. Especially after moving the server to a remote machine. It turned out that the server supported remote execution of many operations, allowing us to

run the graph traversal and querying inside the server. That means looking at our graph interactions and changing them in a way that switched from the transparent, direct graph access via the entities to a different interaction pattern.

We looked into the different modes of remotely executed operations and found traversals, Cypher and Gremlin queries and index lookups. Most of them already matched our needs but the Cypher and Gremlin approaches were best suited, because they also handled index operations and allowed to return partial attribute sets and subgraphs.

So we looked at our use-case (aka page)-based interactions with the graph entities and converted them to Cypher queries on repositories where appropriate, measuring the performance improvements as we went.

There was also a nice mechanism of mapping Cypher query results to Domain Concepts. You just had to declare and annotate an interface that represents the query results as domain entities and the nodes and relationships returned by Cypher were converted into the appropriate entities.

Example 17.3. Example of query result mapping

```
public interface MovieRepository extends GraphRepository<Movie> {

    @Query("START movie=node:Movie(id={0})
           MATCH movie-[rating?:rating]->(),
           movie<-[:ACTS_IN]-actor
           RETURN movie, COLLECT(actor), AVG(rating.stars)")
    MovieData getMovieData(String movieId);

    @MapResult
    public interface MovieData {
        @ResultColumn("movie")
        Movie getMovie();

        @ResultColumn("AVG(rating.stars)")
        Double getRating();

        @ResultColumn("COLLECT(actor)")
        Iterable<Actor> getCast();
    }
}
```

This allowed us to get all the data needed for rendering a page in a single call to the server, greatly diminishing the chatter between the client and the server.

17.2. Other approaches

Another approach using the Neo4j-Server would be to write a custom server extension using the `SpringPluginInitializer` provided by `spring-data-neo4j-rest`. This extension would use the well known entities and approaches as it runs inside the server atop a embedded graph database. From the extension we would expose custom, domain and use-case oriented REST endpoints that could then be consumable by any kind of webapp, even a pure Javascript based browser app.

Chapter 18. Conclusion

To new frontiers

Pretty neat. We were satisfied with what we got here with little effort and high performance. Lots of opportunities to expand the social movie database showed up during development. Like adding more social features like tagging, communication streams, location based features (cinemas) and much more.

But we leave you with that as an exercise to enjoy and explore. Thanks for following the tutorial and make sure to get back to us with suggestions for improvements or reports about unexpected behaviours at the [discussion forums](#), or the [issue tracker](#).

Part II. Reference Documentation



This part of the Spring Data Neo4j Guide book provides the reference documentation. It details many aspects of the tutorial and also explains concepts that were only just mentioned there.

Its content covers information about the programming model, APIs, concepts, annotations and technical details of Spring Data Neo4j.

Whenever you look for the means to employ the full power of the Spring Data Neo4j library you find your answers in the reference section. If you don't, please inform us about missing or incorrect content so that we can fix that.

Reference Documentation

1. Spring Data and Spring Data Neo4j

[Spring Data](#) is a SpringSource project that aims to provide Spring's convenient programming model and well known conventions for NOSQL databases. Currently there is support for graph (Neo4j), key-value (Redis, Riak), document (MongoDB) and relational (Oracle) databases. Mark Pollack, the author of Spring.NET, is the project lead for the Spring Data project.

The Spring Data Neo4j project, as part of the Spring Data initiative, aims to simplify development with the Neo4j graph database. Like JPA, it uses annotations on simple POJO domain objects. The annotations activate one of the supported mapping approaches, either the simple mapping or the advanced AspectJ mapping. Both use the annotation and reflection metadata for mapping the POJO entities and their fields to nodes, relationships, and properties in the graph database.

Spring Data Neo4j allows, at any time, to drop down to the Neo4j-API, see Chapter 19, *Introduction to Neo4j* level to execute functionality with the highest performance possible.

For Integration of Neo4j and Grails/GORM please refer to the Neo4j [grails plugin](#). For other language bindings or frameworks visit the [Neo4j Wiki](#).

2. Reference Documentation Overview

The explanation of Spring Data Neo4js programming model starts with some underlying details. The basic internal workings of the two mapping modes are explained in the initial chapter. Section 20.1, “Object Graph Mapping” covers the simple mapping and Section 20.2, “Advanced Mapping with AspectJ” contains details about the advanced mapping. It also explains some of the common issues around AspectJ tooling with the current IDEs.

To get started with a simple application, you need only your domain model and the annotations (see Section 20.4, “Defining node entities”) provided by the library. You use annotations to mark domain objects to be reflected by nodes and relationships of the graph database. For individual fields the annotations allow you to declare how they should be processed and mapped to the graph. For property fields and references to other entities this is straightforward.

To use advanced functionality like traversals, Cypher and Gremlin, a basic understanding of the graph data model is required. The graph data model is explained in the chapter about Neo4j, see Chapter 19, *Introduction to Neo4j*.

Relationships between entities are first class citizens in a graph database and therefore worth a separate chapter (Section 20.5, “Relating node entities”) describing their usage in Spring Data Neo4j.

Indexing operations are useful for finding individual nodes and relationships in a graph. They can be used to start graph operations or to be processed in your application. Indexing in the plain Neo4j API is a bit more involved. Spring Data Neo4j maintains automatic indexes per entity class, with `@Indexed` annotations on relevant fields. (Section 20.6, “Indexing”)

Being a Spring Data library, Spring Data Neo4j offers a comprehensive Neo4j-Template (Section 20.7, “Neo4jTemplate”) for interacting with the mapped entities and the Neo4j graph database. The operations provided by Spring Data Neo4j - Repositories per mapped entity class are based on the

API offered by the Neo4j-Template. It also provides the operations of the Neo4j Core API in a more convenient way. Especially the querying (Indexes, Cypher, Gremlin and Traversals) and result conversion facilities allow writing very concise code.

Spring Data Commons provides a very powerful repository infrastructure that is also leveraged in Spring Data Neo4j. Those repositories consist only of a composition of interfaces that declare the available functionality in each repository. The implementation details of commonly used persistence methods are handled by the library. At least for typical CRUD, index- and query-operations that is very convenient. The repositories are extensible by annotated, named or derived finder methods. For custom implementations of repository methods you are free to add your own code. (Section 20.8, “CRUD with repositories”).

To be able to leverage the schema-free nature of Neo4j it is possible to project any entity to any other entity type. That is useful as long as they share some properties (or relationships). The entities don't have to share any super-types or hierarchies. How that works is explained here: Section 20.9, “Projecting entities”.

Spring Data Neo4j also allows you to integrate with the powerful geospatial graph library Neo4j-Spatial that offers full support for working with any kind of geo-data. Spring Data Neo4j repositories expose a couple of those operations via bounding-box and near-location searches. Section 20.10, “Geospatial Queries”.

Using computed fields that are dynamically backed by graph operations is a bit more involved. First you should know about traversals, Cypher queries and Gremlin expressions. Those are explained in the Chapter 19, *Introduction to Neo4j* Neo4j-API. Then you can start using virtual, computed fields in your entities Section 20.9, “Projecting entities” .

If you like the ActiveRecord approach that uses persistence methods mixed into the domain classes, you will want to look at the description of the additional entity methods (see Section 20.11, “Active Record Methods for Advanced Mapping Mode”) that are added to your domain objects by Spring Data Neo4j Aspects. Those allow you to manage the entity lifecycle as well as to connect entities. Those methods also provide the means to execute the mentioned graph operations with your entity as a starting point.

Neo4j is a fully ACID, enterprise grade database. It uses Java transactions, and internally a 2 phase commit protocol, to guarantee the safety of your data. The implications of that are described in the chapter around transactions. (Section 20.12, “Transactions”)

The need of an active transaction for mutating the state of nodes or relationships implies that direct changes to the graph are only possible in a transactional context. Unfortunately many higher level application layers don't want to care about transactions and the open-session-in-view pattern is not widely used. Therefore Spring Data Neo4j advanced mapping introduced an entity lifecycle and added support for detached entities which can be used for temporary domain objects that are not intended to be stored in the graph or which will be attached to the graph only later. (Section 20.13, “Detached node entities in advanced mapping mode”)

For the simple mapping this is not necessary as domain objects are detached by default and have to be explicitly reattached to the graph to store the changes.

Unlike Neo4j which is a schema free database, Spring Data Neo4j works on Java domain objects. So it needs to store the type information in the graph to be able to reconstruct the entities when just nodes are

retrieved. To achieve that it employs type-representation-strategies which are described in a separate chapter. (see Section 20.14, “Entity type representation”)

Spring Data Neo4j offers basic support for bean property validation (JSR-303). Annotations from that JSR are recognized and evaluated whenever a property is set, or when a previously detached entity is persisted to the graph. (see Section 20.15, “Bean validation (JSR-303)”)

Unfortunately the setup of Spring Data Neo4j advanced mapping mode is more involved than we'd like. That is partly due to the Maven setup and dependencies for AspectJ, which can be alleviated by using different build systems like Gradle or Ant/Ivy. The Spring configuration itself boils down to two lines of `<spring-neo4j>` namespace setup. (see Chapter 21, *Environment setup*)

In a polyglot persistence context Spring Data Neo4j can also be used in a JPA environment to add graph features to your JPA entities. In the Chapter 22, *Cross-store persistence* the slightly different behavior and setup of a Graph-JPA interaction are described.

The provided samples, which are also publicly hosted on [Github](#), are explained in Chapter 23, *Sample code*.

The performance implications of using Spring Data Neo4j are detailed in Chapter 25, *Performance considerations*. This chapter also discusses which use cases should not be handled with Spring Data Neo4j.

As AspectJ might not be well known to everyone, some of the core concepts of the aspect oriented, advanced mapping mode for Java are explained in Chapter 26, *AspectJ details*.

How to consume the REST-API of a Neo4j-Server is the topic of Chapter 27, *Neo4j Server*. But Spring Data Neo4j can also be used to create custom Extensions for the Neo4j Server which would serve domain model abstractions to a suitable front-end. So instead of talking low level primitives to a database, the front-end or web-app would communicate via a domain level protocol with endpoints implemented in Jersey and Spring Data Neo4j.



Note

As the advanced mapping mode of Spring Data Neo4j is based on AspectJ and use some advanced features of that toolset, please be aware of that. Please see the section on AspectJ (Section 20.2, “Advanced Mapping with AspectJ”) for details if you run into any problems.

Chapter 19. Introduction to Neo4j

19.1. What is a graph database?

A graph database is a storage engine that is specialized in storing and retrieving vast networks of data. It efficiently stores nodes and relationships and allows high performance traversal of those structures. Properties can be added to nodes and relationships.

Graph databases are well suited for storing most kinds of domain models. In almost all domains, there are certain things connected to other things. In most other modeling approaches, the relationships between things are reduced to a single link without identity and attributes. Graph databases allow to keep the rich relationships that originate from the domain, equally well-represented in the database without resorting to also modeling the relationships as "things". There is very little "impedance mismatch" when putting real-life domains into a graph database.

19.2. About Neo4j

[Neo4j](#) is a NOSQL graph database. It is a fully transactional database (ACID) that stores data structured as graphs. A graph consists of nodes, connected by relationships. Inspired by the structure of the human mind, it allows for high query performance on complex data, while remaining intuitive and simple for the developer.

Neo4j has been in commercial development for 10 years and in production for over 7 years. Most importantly it has a helpful and contributing community surrounding it, but it also:

- has an intuitive, rich graph-oriented model for data representation. Instead of tables, rows, and columns, you work with a graph consisting of [nodes, relationships, and properties](#).
- has a disk-based, native storage manager optimized for storing graph structures with maximum performance and scalability.
- is scalable. Neo4j can handle graphs with many billions of nodes/relationships/properties on a single machine, but can also be scaled out across multiple machines for high availability.
- has a powerful traversal framework and query languages for traversing the graph.
- can be deployed as a standalone server or an embedded database with a very small distribution footprint.
- has a core Java [API](#).

In addition, Neo4j has ACID transactions, durable persistence, concurrency control, transaction recovery, high availability, and more. Neo4j is released under a dual free software/commercial license model.

19.3. GraphDatabaseService

The API of `org.neo4j.graphdb.GraphDatabaseService` provides access to the storage engine. Its features include creating and retrieving nodes and relationships, managing indexes (via the `IndexManager`), database life cycle callbacks, transaction management, and more.

The `EmbeddedGraphDatabase` is an implementation of `GraphDatabaseService` that is used to embed Neo4j in a Java application. This implementation is used so as to provide the highest and tightest integration with the database. Besides the embedded mode, the [Neo4j server](#) provides access to the graph database via an HTTP-based REST API.

19.4. Creating nodes and relationships

Using the API of `GraphDatabaseService`, it is easy to create nodes and relate them to each other. Relationships are typed. Both nodes and relationships can have properties. Property values can be primitive Java types and Strings, or arrays of both. Node creation and modification has to happen within a transaction, while reading from the graph store can be done with or without a transaction.

Example 19.1. Neo4j usage

```
GraphDatabaseService graphDb = new EmbeddedGraphDatabase( "helloworld" );
Transaction tx = graphDb.beginTx();
try {
    Node firstNode = graphDb.createNode();
    firstNode.setProperty( "message", "Hello, " );
    Node secondNode = graphDb.createNode();
    secondNode.setProperty( "message", "world!" );

    Relationship relationship = firstNode.createRelationshipTo( secondNode,
        DynamicRelationshipType.of("KNOWS") );
    relationship.setProperty( "message", "brave Neo4j " );
    tx.success();
} finally {
    tx.finish();
}
```

19.5. Graph traversal

Getting a single node or relationship and examining it is not the main use case of a graph database. Fast graph traversal of complex, interconnected data and application of graph algorithms are. Neo4j provides a DSL for defining `TraversalDescriptions` that can then be applied to a start node and will produce a lazy `java.lang.Iterable` result of nodes and/or relationships.

Example 19.2. Traversal usage

```
TraversalDescription traversalDescription = Traversal.description()
    .depthFirst()
    .relationships(KNOWS)
    .relationships(LIKES, Direction.INCOMING)
    .evaluator(Evaluators.toDepth(5));
for (Path position : traversalDescription.traverse(myStartNode)) {
    System.out.println("Path from start node to current position is " + position);
}
```

19.6. Indexing

The best way for retrieving start nodes for traversals and queries is by using Neo4j's integrated index facilities. The `GraphDatabaseService` provides access to the `IndexManager` which in turn provides named indexes for nodes and relationships. Both can be indexed with property names and values. Retrieval is done with query methods on indexes, returning an `IndexHits` iterator.

Spring Data Neo4j provides automatic indexing via the `@Indexed` annotation, eliminating the need for manual index management.



Note

Modifying Neo4j indexes also requires transactions.

Example 19.3. Index usage

```
IndexManager indexManager = graphDb.index();
Index<Node> nodeIndex = indexManager.forNodes("a-node-index");
Node node = ...;
Transaction tx = graphDb.beginTx();
try {
    nodeIndex.add(node, "property", "value");
    tx.success();
} finally {
    tx.finish();
}
for (Node foundNode : nodeIndex.get("property", "value")) {
    // found node
}
```

19.7. Querying the Graph with Cypher

Neo4j provides a graph query language called ["Cypher"](#) which draws from many sources. It resembles SQL but with an iconic representation of patterns in the graph (concepts drawn from SPARQL). The Cypher execution engine was written in Scala to leverage the high expressiveness for lazy sequence operations of the language and the parser combinator library. A screencast explaining the possibilities in detail can be found on the [Neo4j video site](#).

Cypher queries always begin with a start set of nodes. Those can be either expressed by their id's or by a index lookup expression. Those start-nodes are then related to other nodes in the match clause. Start and match clauses can introduce new identifiers for nodes and relationships. In the where clause additional filtering of the result set is applied by evaluating expressions. The return clause defines which part of the query result will be available. Aggregation also happens in the return clause by using aggregation functions on some of the values. Sorting can happen in the order by clause and the skip and limit parts restrict the result set to a certain window.

Cypher can be executed on an embedded graph db using an `ExecutionEngine` and `CypherParser`. This is encapsulated in Spring Data Neo4j with `CypherQueryEngine`. The Neo4j-REST-Server comes with a Cypher-Plugin that is accessible remotely and is available in the Spring Data Neo4j REST-Binding.

Example 19.4. Cypher Examples on the Cineasts.net Dataset

```
// Actors of Forrest Gump:
start movie=node:Movie("title:Matr*") match movie<-[:ACTS_IN]-actor
return actor.name, actor.birthplace?

// User-Ratings:
start user=node:User(login='micha') match user-[r,:RATED]->movie where r.stars > 3
return movie.title, r.stars, r.comment

// Mutual Friend recommendations:
start user=node:Micha(login='micha') match user-[:FRIEND]-friend-[r,:RATED]->movie where r.stars > 3
return friend.name, movie.title, r.stars, r.comment?

// Movie suggestions based on a movie:
start movie=node:Movie(id='13') match (movie)<-[:ACTS_IN]-()-[:ACTS_IN]->(suggestion)
return suggestion.title, count(*) order by count(*) desc limit 5

// Co-Actors, sorted by count and name of Lucy Liu
start lucy=node(1000) match lucy-[:ACTS_IN]->movie<-[:ACTS_IN]-co_actor
return count(*), co_actor.name order by count(*) desc,co_actor.name limit 20

// recommendations including counts, grouping and sorting
start user=node:User(login='micha') match user-[:FRIEND]-()-[r,:RATED]->movie
return movie.title, AVG(r.stars), count(*) order by AVG(r.stars) desc, count(*) desc
```

19.8. Gremlin a Graph Traversal DSL

Gremlin is an expressive Groovy DSL developed by [Marko Rodriguez](#) as part of the [Tinkerpop](#) stack. It builds on top of a pipe implementation (Blueprints Pipes) that uses connected operations to traverse a graph. Gremlin has a concise syntax but is Turing complete.

Gremlin can be executed by including the Tinkerpop and Blueprints dependencies and then requesting a ScriptEngine of type "gremlin" from the javax.Script* facilities. In Spring Data Neo4j this is encapsulated in GremlinQueryEngine. The Neo4j-REST-Server also comes with a Gremlin-Plugin that is accessible remotely and is available in the Spring Data Neo4j REST-Binding.

Example 19.5. Sample Gremlin Queries

```
// Vertex with id 1
v = g.v(1)

// determine the name of the vertices that vertex 1 knows and that are older than 30 years of age
v.outE{it.label=='knows'}.inV{it.age > 30}.name

// calculate basic collaborative filtering for vertex 1
m = [:]
g.v(1).out('likes').in('likes').out('likes').groupCount(m)
m.sort{a,b -> a.value <=> b.value}
```

Chapter 20. Programming model

This chapter covers the fundamentals of the programming model behind Spring Data Neo4j. It discusses the simple and advanced mapping modes, the annotations provided by Spring Data Neo4j and how to use them. Examples for this section are taken from the "IMDB" project of [Spring Data Neo4j examples](#).

20.1. Object Graph Mapping

Up until recently Spring Data Neo4j supported only the more advanced and flexible AspectJ based mapping approach, see Section 20.2, “Advanced Mapping with AspectJ”. Feedback about issues with the AspectJ tooling and other implications persuaded us to add a simpler mapping (see Section 20.3, “Simple Object Graph Mapping”) to Spring Data Neo4j. Both versions work with the same annotations and provide similar API's, but differ in behaviour.

Reflection and Annotation-based metadata is collected about persistent entities in the `Neo4jMappingContext` which provides it to any part of the library. The information is stored in `Neo4jPersistentEntity` instances which hold all the `Neo4jPersistentProperty`'s of the type. Each entity can be checked to determine whether it represents a Node or a Relationship. Properties declare detailed data about their indexing and relationship information as well as type information that also covers nested generic types. With all that information available it is simple to select the appropriate strategy for mapping each entity and field to elements, relationships and properties of the graph.

The main difference is in the way of accessing the graph. In the simple mapping the required information is copied into the entity on load and only stored back when an explicit save operation occurs. In the advanced mapping (AspectJ-enhanced) approach a node or relationship is attached via an additional field to the entity and all read- and write-operations (inside of Transactions) happen through that.

For the simple mapping mode, declaration of fetch strategies for related entities is necessary to avoid loading the whole graph eagerly into memory. The initial approach uses just a simple `@Fetch` annotations on relationship properties. The resulting `MappingPolicy` is provided to the infrastructure methods to ensure the correct loading behaviour. Both, `Neo4jPersistentEntity` and `Neo4jPersistentProperty` can be queried for the `MappingPolicy`.

Otherwise the two approaches share much of the infrastructure. E.g. for creating new entity instances from type information store in the graph (Section 20.14, “Entity type representation”), the infrastructure for mapping individual fields to graph properties and relationships and everything related to indexing and querying. A certain part of that is also exposed via the `Neo4jTemplate` for direct use.

20.2. Advanced Mapping with AspectJ

Behind the scenes, Spring Data Neo4j leverages [AspectJ](#) aspects to modify the behavior of annotated POJO entities (see Chapter 26, *AspectJ details*). Each node entity is backed by a graph node that holds its properties and relationships to other entities. AspectJ is used for intercepting field access, so that Spring Data Neo4j can retrieve the appropriate information from the entity's backing node or relationship.

The aspect introduces a internal field (`entityState`) and some public methods (see Section 20.11, “Active Record Methods for Advanced Mapping Mode”) to the entities, for instance as

`entity.getPersistentState()` and `entity.relateTo`. It also introduces some methods for graph operations that start at the current entity. Introduced methods for `equals()` and `hashCode()` use the underlying node or relationship. Please take the introduced field into account when serializing your entities and exclude it from the serialization process.

Spring Data Neo4j internally uses an abstraction called `EntityState` that the field access and instantiation advices of the aspect delegate to. This way, the aspect code is kept to a minimum, focusing mainly on the pointcuts and delegation. The `EntityState` then uses a number of `FieldAccessorFactories` to create a `FieldAccessor` instance per field that does the specific handling needed for the concrete field type. There is some caching involved as well, so it handles repeated instantiation efficiently.

To use the advanced, AspectJ based mapping, please add `spring-data-neo4j-aspects` as a dependency and set up the AspectJ integration in Maven or other build tools as explained in Chapter 21, *Environment setup*. Some hints for your IDE setup are described below.

20.2.1. AspectJ IDE support

As Spring Data Neo4j uses some advanced features of AspectJ, users may experience issues with their IDE reporting errors where in fact there are none. Features that might be reported wrongfully include: introduction of methods to interfaces, declaration of additional interfaces for annotated classes, and generified introduced methods.

IDE's not providing the full AJ support might mark parts of your code as errors. You should rely on your build-system and tests to verify the correctness of the code. You might also have your Entities (or their interfaces) implement the `NodeBacked` and `RelationshipBacked` interfaces directly to benefit from completion support and error checking.

Eclipse and STS support AspectJ via the AJDT plugin which can be installed from the update-site: <http://download.eclipse.org/tools/ajdt/37/update/> (it might be necessary to use the latest development snapshot of the plugin <http://download.eclipse.org/tools/ajdt/36/dev/update/>). The current version that does not show incorrect errors is AspectJ 1.6.12 (included in STS 2.8.0), previous versions are reported to mislead the user.



Note

There might be some issues with the eclipse maven plugin not adding AspectJ files correctly to the build path. If you encounter issues, please try the following: Try editing the build path to include `**/*.aj` for the `spring-data-neo4j` project. You can do this by selecting "Build Path -> Configure Build Path ..." from the Package Explorer. Then for the `spring-data-neo4j/src/main/java` add `**/*.aj` to the Included path. For importing an Spring Data Graph project into Eclipse with m2e. Please make sure that the [AspectJ Configurator](#) is installed and

The AspectJ support in IntelliJ IDEA lacks some of the features. JetBrains is working on improving the situation in their upcoming 11 release of their popular IDE. Their latest work is available under their early access program (EAP). Building the project with the AspectJ compiler `ajc` works in IDEA (Options -> Compiler -> Java Compiler should show `ajc`). Make sure to give the compiler at least 512 MB of RAM.

20.3. Simple Object Graph Mapping

In addition to the advanced object graph mapping using AspectJ, Spring Data Neo4j also supports a simpler mode that converts graph data into domain objects and vice versa. It does not require any additional set up and should work out of the box. The simple mapping approach uses the same annotations (???) as the advanced mapping to declare mapping meta-information.

The simple object graph mapping comes into play whenever an entity is constructed from a node or relationship. This could be done explicitly like during the lookup- or create-operations of the repositories and the `Neo4jTemplate` but also implicitly while executing any graph operation that returns nodes or relationships and expecting mapped entities to be returned.

It uses the available meta-information about the persistent entity to iterate over its properties and relationships, fetching their data from the graph while doing so. It also executes computed fields and stores the resulting values in the properties.

We try to avoid loading the whole graph into memory by not following relationships eagerly. A dedicated `@Fetch` annotation controls instead if related entities are loaded or not. Whenever an entity is not fully loaded, then only its id is stored. Those entities or collections of entities can then later be loaded explicitly using the `template.fetch()` operation.

The additional fetch information is stored in a `MappingPolicy` which can be retrieved via the `Neo4jTemplate` for classes. Both `Neo4jPersistentEntity` as well as `Neo4jPersistentProperty` provide access to that information on their scope.



Note

Please note that if you have two collections in an entity pointing to the same relationship and one of them has data and the other is empty due to the nature of persisting it, one will override the other in the graph so that you might end up with no data. If you want a relationship-collection to be ignored on save set it to null.

Example 20.1. Examples for loading entities from the graph

```
@Autowired Neo4jOperations template;

@NodeEntity class Person {
    String name;
    @Fetch Person boss;
    Person spouse;

    @RelatedTo(type = "FRIEND", direction = BOTH)
    @Fetch Set<Person> friends;
}

Person person = template.findOne(personId);
assertNotNull(person.getBoss().getName());

assertNotNull(person.getSpouse().getId());
assertNull(person.getSpouse().getName());

template.fetch(person.getSpouse());
assertNotNull(person.getSpouse().getName());

assertEquals(10, person.getFriends().size());
assertNotNull(firstFriend.getName());
```



Note

Both the simple mapping approach as well as the fetch strategies (`MappingPolicy`) debuted in Spring Data Neo4j 2.0. So there might be rough edges and there are certainly many areas for improvement and extension. We look forward to your feedback on this topic.

As we tried to encapsulate each aspect of the mapping process into a separate class the resulting fabric of responsibilities is quite intricate. All of them are set up in the `MappingInfrastructure` that is part of the `Neo4jTemplate` setup.

20.4. Defining node entities

Node entities are declared using the `@NodeEntity` annotation. Relationship entities use the `@RelationshipEntity` annotation.

20.4.1. @NodeEntity: The basic building block

The `@NodeEntity` annotation is used to turn a POJO class into an entity backed by a node in the graph database. Fields on the entity are by default mapped to properties of the node. Fields referencing other node entities (or collections thereof) are linked with relationships. If the `useShortNames` attribute is set to false, the property and relationship names will have the class name of the entity prepended.

`@NodeEntity` annotations are inherited from super-types and interfaces. It is not necessary to annotate your domain objects at every inheritance level.

If the `partial` attribute is set to true, this entity takes part in a cross-store setting, where the entity lives in both the graph database and a JPA data source. See Chapter 22, *Cross-store persistence* for more information.

Entity fields can be annotated with `@GraphProperty`, `@RelatedTo`, `@RelatedToVia`, `@Indexed`, `@GraphId`, `@Query` and `@GraphTraversal`.

Example 20.2. Simplest node entity

```
@NodeEntity
public class Movie {
    String title;
}
```

20.4.2. @GraphId: Neo4j -id field

For the simple mapping this is a required field which must be of type `Long`. It is used by Spring Data Neo4j to store the node or relationship-id to re-connect the entity to the graph.



Note

It must not be a primitive type because then the "non-attached" case can not be represented as the default value 0 would point to the reference node. Please make also sure that an `equals()` and `hashCode()` method have to be provided which take the `id` field into account (and also handle the "non-attached", null case).

For the advanced mapping such a field is optional. Only if the underlying id has to be accessed, it is needed.

20.4.3. @GraphProperty: Optional annotation for property fields

It is not necessary to annotate property fields, as they are persisted by default; all fields that contain primitive values are persisted directly to the graph. All fields convertible to a `String` using the Spring conversion services will be stored as a string. Spring Data Neo4j includes a custom conversion factory that comes with converters for `Enums` and `Dates`. Transient fields are not persisted.

Collections of collections of primitive or convertible values are stored as well. They are converted to arrays of their type or strings respectively.

This annotation is typically used with cross-store persistence. When a node entity is configured as partial, then all fields that should be persisted to the graph must be explicitly annotated with `@GraphProperty`.

`@GraphProperty` can specify default values for properties that are not in the graph. Default values are specified as `String` representations and will be converted to the correct target type using the existing conversion facilities. For example `@GraphProperty(defaultValue="20") Integer age`.

It is also possible to declare the type that should be used for the storage inside of Neo4j. For instance if a `Date` property should be stored as an `Long` value instead of the default `String`, the annotation would look like `@GraphProperty(propertyType = Long.class)`. For the actual mapping of the `Field-Type` to the Neo4j-Property type there has to be a `Converter` registered in the Spring-Config.

20.4.4. @Indexed: Making entities searchable by field value

The `@Indexed` annotation can be declared on fields that are intended to be indexed by the Neo4j indexing facilities. The resulting index can be used to later retrieve nodes or relationships that contain a certain property value, e.g. a name. Often an index is used to establish the start node for a traversal. Indexes are accessed by a repository for a particular node or relationship entity type. See Section 20.6, “Indexing” and Section 20.8, “CRUD with repositories” for more information.

20.4.5. @Query: fields as query result views

The `@Query` annotation leverages the delegation infrastructure supported by Spring Data Neo4j. It provides dynamic fields which, when accessed, return the values selected by the provided query language expression. The provided query must contain a placeholder named `{self}` for the the current entity. For instance the query `start n={self} match n-[:FRIEND]->friend return friend`. Graph queries can return variable number of entities. That's why annotation can be put onto fields with a single value, a subclass of `Iterable` of a concrete type or an `Iterable` of `Map<String, Object>`. Additional parameters are taken from the `params` attribute of the `@Query` annotation. These parameter tuples form key-value pairs that are provided to the query at execution time.

Example 20.3. @Graph on a node entity field

```
@NodeEntity
public class Group {
    @Query(value = "start n={self} match (n)-[r]->(friend) where r.type = {relType} return friend",
          params = {"relType", "FRIEND"})
    private Iterable<Person> friends;
}
```



Note

Please note that this annotation can also be used on repository methods. (Section 20.8, “CRUD with repositories”)

20.4.6. @GraphTraversal: fields as traversal result views

The `@GraphTraversal` annotation also leverages the delegation infrastructure supported by Spring Data aspects. It provides dynamic fields which, when accessed, return an `Iterable` of node or relationship entities that are the result of a traversal starting at the entity containing the field. The `TraversalDescription` used for this is created by the `FieldTraversalDescriptionBuilder` class defined by the `traversal` attribute. The class of the resulting node entities must be provided with the `elementClass` attribute.

Example 20.4. @GraphTraversal from a node entity

```
@NodeEntity
public class Group {
    @GraphTraversal(traversal = PeopleTraversalBuilder.class,
        elementClass = Person.class, params = "persons")
    private Iterable<Person> people;

    private static class PeopleTraversalBuilder implements FieldTraversalDescriptionBuilder {
        @Override
        public TraversalDescription build(NodeBacked start, Field field, String... params) {
            return new TraversalDescriptionImpl()
                .relationships(DynamicRelationshipType.withName(params[0]))
                .filter(Traversal.returnAllButStartNode());
        }
    }
}
```

20.5. Relating node entities

Since relationships are first-class citizens in Neo4j, associations between node entities are represented by relationships. In general, relationships are categorized by a type, and start and end nodes (which imply the direction of the relationship). Relationships can have an arbitrary number of properties. Spring Data Neo4j has special support to represent Neo4j relationships as entities too, but it is often not needed.



Note

As of Neo4j 1.4.M03, circular references are allowed. Spring Data Neo4j reflects this accordingly.

20.5.1. @RelatedTo: Connecting node entities

Every field of a node entity that references one or more other node entities is backed by relationships in the graph. These relationships are managed by Spring Data Neo4j automatically.

The simplest kind of relationship is a single field pointing to another node entity (1:1). In this case, the field does not have to be annotated at all, although the annotation may be used to control the direction and type of the relationship. When setting the field, a relationship is created when the entity is persisted. If the field is set to `null`, the relationship is removed.

Example 20.5. Single relationship field

```
@NodeEntity
public class Movie {
    private Actor topActor;
}
```

It is also possible to have fields that reference a set of node entities (1:N). These fields come in two forms, modifiable or read-only. Modifiable fields are of the type `Set<T>`, and read-only fields are `Iterable<T>`, where `T` is a `@NodeEntity`-annotated class.

Example 20.6. Node entity with relationships

```
@NodeEntity
public class Actor {
    @RelatedTo(type = "topActor", direction = Direction.INCOMING)
    private Set<Movie> topActorIn;

    @RelatedTo(type = "ACTS_IN")
    private Set<Movie> movies;
}
```

For the simple mapping, the automatic transitive loading of related entities depends on declaration of `@Fetch` at the property. Otherwise the related node or relationship entities will just be initialized with their id for later loading.

When using the advanced mapping, Fields referencing other entities should not be manually initialized, as they are managed by Spring Data Neo4j Aspects under the hood. 1:N fields can be accessed immediately, and Spring Data Neo4j will provide a Set representing the relationships.

If this Set of related entities is modified, the changes are reflected in the graph, relationships are added, removed or updated accordingly.

**Note**

Spring Data Neo4j ensures by default that there is only one relationship of a given type between any two given entities. This can be circumvented by using the `createRelationshipBetween()` method with the `allowDuplicates` parameter on repositories or entities.

**Note**

Before an entity has been persisted for the first time, it will not have its state managed by Spring Data Neo4j. For example, given the `Actor` class defined above, if `actor.movies` was accessed in a non-persisted entity, it would return `null`, whereas if it was accessed in a persisted entity, it would return an empty managed set.

When an Interface is used as target type for the Set and/or as `elementClass` it should be marked as `@NodeEntity` too.

By setting `direction` to `BOTH`, relationships are created in the outgoing direction, but when the 1:N field is read, it will include relationships in both directions. A cardinality of M:N is not necessary because relationships can be navigated in both directions.

In the advanced mapping mode, the relationships can also be accessed by using the methods `entity.getRelationshipBetween(target, type)` and `entity.relateTo(target, type)` available

on each `NodeEntity`. These methods find and create Neo4j relationships. It is also possible to manually remove relationships by using `entity.removeRelationshipTo(target, type)`. Using these methods is significantly faster than adding/removing from the collection of relationships as it doesn't have to re-synchronize a whole set of relationships with the graph.

Methods of the same semantics exist in the repositories to be used in the simple mapping mode.



Note

Other collection types than `Set` are not supported so far, also currently `NO Map<RelationshipType, Set<NodeBacked>>`.

20.5.2. @RelationshipEntity: Rich relationships

To access the full data model of graph relationships, POJOs can also be annotated with `@RelationshipEntity`, making them relationship entities. Just as node entities represent nodes in the graph, relationship entities represent relationships. As described above, fields annotated with `@RelatedTo` provide a way to only link node entities via relationships, but it provides no way of accessing the relationships themselves.

Relationship entities can be accessed via by `@RelatedToVia`-annotated (Section 20.5.3, “`@RelatedToVia`: Accessing relationship entities”) fields or methods like `entity.getRelationshipTo()` or `template|repository.getRelationship(s)Between()`.

Relationship entities either be instantiated directly and set or added to `@RelatedToVia`-annotated fields or created by the introduced `entity.relateTo()`, `template|repository.createRelationshipBetween()` methods (see also Section 20.11, “Active Record Methods for Advanced Mapping Mode”)

Fields in relationship entities are, similarly to node entities, persisted as properties on the relationship. For accessing the two endpoints of the relationship, two special annotations are available: `@StartNode` and `@EndNode`. A field annotated with one of these annotations will provide read-only access to the corresponding endpoint, depending on the chosen annotation.

For the relationship-type a `String` or `RelationshipType` field annotated with `@RelationshipType` is available. When Relationship-Entities are instantiated directly, the relationship type has to be provided either in this annotated field or as part of the `@RelationshipEntity` annotation.

Example 20.7. Relationship entity (in advanced mapping)

```
@NodeEntity
public class Actor {
    public Role playedIn(Movie movie, String title) {
        return relateTo(movie, Role.class, "ACTS_IN");
    }
}

@RelationshipEntity
public class Role {
    String title;

    @StartNode private Actor actor;
    @EndNode private Movie movie;
}
```

20.5.3. @RelatedToVia: Accessing relationship entities

To provide easy programmatic access to the richer relationship entities of the data model, the annotation `@RelatedToVia` can be added on fields of type `Iterable<T>` or `Set<T>` or `T`, where `T` is a `@RelationshipEntity`-annotated class. These fields provide access to relationship entities.

Example 20.8. Relationship entity (in simple mapping)

```
@NodeEntity
public class Actor {
    @RelatedToVia
    @Set<Role> roles=new HashSet<Role>();
    public Role playedIn(Movie movie, String title) {
        Role role=new Role(this,movie,title);
        roles.add(role);
        return role;
    }
    @RelatedToVia(type="FRIEND_OF", direction=Direction.INCOMING)
    Friendship bestFriend;
}

@RelationshipEntity(type = "ACTS_IN")
public class Role {
    String title;

    @StartNode private Actor actor;
    @EndNode private Movie movie;
}

@RelationshipEntity
public class Friendship {
    Date since;

    @StartNode private Actor actor;
    @EndNode private Person buddy;
}
```

20.6. Indexing

Indexing is used in Neo4j to quickly find nodes and relationships to start graph operations from. Either for manually traversing the graph, using the traversal framework, cypher or gremlin queries or for "global" graph operations. Indexes are also employed to ensure uniqueness of elements with certain properties.

The Neo4j graph database employs different index providers for exact lookups and fulltext searches. Lucene is the default index provider implementation. Each named index is configured to be fulltext or exact. There is also a spatial index provider for geo-searches.

20.6.1. Exact and numeric index

When using the standard Neo4j API, nodes and relationships have to be manually indexed with key-value pairs, typically being the property name and value. When using Spring Data Neo4j, this task is simplified to just adding an `@Indexed` annotation on entity fields by which the entity should be searchable. This will result in automatic updates of the index every time an indexed field changes.

Numerical fields are indexed numerically so that they are available for range queries. All other fields are indexed with their string representation.

The `@Indexed` annotation also provides the option of using a custom index name. The default index name is the simple class name of the entity, so that each class typically gets its own index. It is recommended to not have two entity classes with the same class name, regardless of package.

If a field is declared in a superclass but different indexes for subclasses are needed, the `level` attribute declares what will be used as index. `Level.CLASS` uses the class where the field was declared and `Level.INSTANCE` uses the class that is provided or of the actual entity instance.

The indexes can be queried by using a repository (see Section 20.8, “CRUD with repositories”). The repository is an instance of `org.springframework.data.neo4j.repository.IndexRepository`. The methods `findByPropertyValue()` and `findAllByPropertyValue()` work on the exact indexes and return the first or all matches. To do range queries, use `findAllByRange()` (please note that currently both values are inclusive).

For providing explicit index names the repository has to extend `NamedIndexRepository`. This adds the shown methods with another signature that take the index name as first parameter.

Example 20.9. Indexing entities

```
@NodeEntity
class Person {
    @Indexed(indexName = "people") String name;
    @Indexed int age;
}

GraphRepository<Person> graphRepository = template.repositoryFor(Person.class);

// Exact match, in named index
Person mark = graphRepository.findByPropertyValue("people", "name", "mark");

// Numeric range query, index name inferred automatically
for (Person middleAgedDeveloper : graphRepository.findAllByRange("age", 20, 40)) {
    Developer developer=middleAgedDeveloper.projectTo(Developer.class);
}
```

20.6.2. Fulltext indexes

Spring Data Neo4j also supports fulltext indexes. By default, indexed fields are stored in an exact lookup index. To have them analyzed and prepared for fulltext search, the `@Indexed` annotation has the type attribute which can be set to `IndexType.FULLTEXT`. Please note that fulltext indexes require a separate index name as the fulltext configuration is stored in the index itself.

Access to the fulltext index is provided by the `findAllByQuery()` repository method. Wildcards like `*` are allowed. Generally though, the fulltext querying rules of the underlying index provider apply. See the [Lucene documentation](#) for more information on this.

Example 20.10. Fulltext indexing

```
@NodeEntity
class Person {
    @Indexed(indexName = "people-search", type=FULLTEXT) String name;
}

GraphRepository<Person> graphRepository =
    template.repositoryFor(Person.class);

Person mark = graphRepository.findAllByQuery("people-search", "name", "ma*");
```



Note

Please note that indexes are currently created on demand, so whenever an index that doesn't exist is requested from a query or get operation it is created. This is subject to change but has currently the implication that those indexes won't be configured as fulltext which causes subsequent fulltext updates to those indexes to fail.

20.6.3. Unique indexes

Unique indexing with `index.putIfAbsent` and `UniqueFactory` was introduced in Neo4j 1.6. In Spring Data Neo4j this is made available via `Neo4jTemplate.getOrCreateNode`.

In an entity at most one field can be annotated with `@Indexed(unique=true)` regardless of the index-type used. The uniqueness will be taken into account when creating the entity by reusing an existing entity if that unique key-combination already exists. On saving of the field it will be cross-checked against the index and fail with a `DataIntegrityViolationException` if the field was changed to an already existing unique value.

Example 20.11. Unique indexing

```
// creates or finds a node with the unique index-key-value combination
// and initializes it with the properties given
template.getOrCreateNode("users", "login", "mh", map("name", "Michael", "age", 37));

@Entity
@NodeEntity
class Person {
    @Indexed(unique = true) String name;
}

Person mark1 = repository.save(new Person("mark"));
Person mark2 = repository.save(new Person("mark"));

// just one node is created
assertEquals(mark1, mark2);
assertEquals(1, personRepository.count());

Person thomas = repository.save(new Person("thomas"));
thomas.setName("mark");
repository.save(thomas); // fails with a DataIntegrityViolationException
```

20.6.4. Manual index access

The index for a domain class is also available from `Neo4jTemplate` via the `getIndex()` method. The second parameter is optional and takes the index name if it should not be inferred from the class name. It returns the index implementation that is provided by Neo4j.

Example 20.12. Manual index retrieval by type and name

```

@Autowired Neo4jTemplate template;

// Default index
Index<Node> personIndex = template.getIndex(null, Person.class);
personIndex.query(new QueryContext(NumericRangeQuery.newIntRange("age", 20, 40, true, true))
    .sort(new Sort(new SortField("age", SortField.INT, false))));

// Named index
Index<Node> namedPersonIndex = template.getIndex("people", Person.class);
namedPersonIndex.get("name", "Mark");

// Fulltext index
Index<Node> personFulltextIndex = template.getIndex("people-search", Person.class);
personFulltextIndex.query("name", "*cha*");
personFulltextIndex.query("{name:*cha*}");

```

It is also possible to pass in the property name of the entity with an `@Indexed` annotation whose index should be returned.

Example 20.13. Manual index retrieval by property configuration

```

@Autowired Neo4jTemplate template;

Index<Node> personIndex = template.getIndex(Person.class, "age");
personIndex.query(new QueryContext(NumericRangeQuery.newIntRange("age", 20, 40, true, true))
    .sort(new Sort(new SortField("age", SortField.INT, false))));

// Fulltext index
Index<Node> personFulltextIndex = template.getIndex(Person.class, "name");
personFulltextIndex.query("name", "*cha*");
personFulltextIndex.query("{name:*cha*}");

```

20.6.5. Index queries in Neo4jTemplate

For querying the index, the template offers query methods that take either the exact match parameters or a query object/expression, return the results as `Result` objects which then can be converted and projected further using the result-conversion-dsl (see Section 20.7, “Neo4jTemplate”).

20.6.6. Neo4j Auto Indexes

Neo4j allows to configure [auto-indexing](#) for certain properties on nodes and relationships. This auto-indexing differs from the approach used in Spring Data Neo4j because it only updates the indexes when the transaction is committed. So the index modifications will only be available after the successful commit. It is possible to use the specific index names `node_auto_index` and `relationship_auto_index` when querying indexes in Spring Data Neo4j either with the query methods in template and repositories or via Cypher and Gremlin.

20.6.7. Spatial Indexes

Spring Data Neo4j offers limited support for spatial queries using the `neo4j-spatial` library. See the separate chapter Section 20.10, “Geospatial Queries” for details.

20.7. Neo4jTemplate

The `Neo4jTemplate` offers the convenient API of Spring templates for the Neo4j graph database. The Spring Data Neo4j Object Graph mapping builds upon the core functionality of the template to persist

objects to the graph and load them in a variety of ways. The template handles the active mapping mode (Section 20.1, “Object Graph Mapping”) transparently.

Besides methods for creating, storing and deleting entities, nodes and relationships in the graph, `Neo4jTemplate` also offers a wide range of query methods. To reduce the proliferation of query methods a simple result handling DSL was added.

20.7.1. Basic operations

For direct retrieval of nodes and relationships, the `getReferenceNode()`, `getNode()` and `getRelationship()` methods can be used.

There are methods (`createNode()` and `createRelationship()`) for creating nodes and relationships that automatically set provided properties.

Example 20.14. Neo4j template

```
// TODO auto-post-construct !!
final Neo4jTemplate neo = new Neo4jTemplate(graphDatabase);
neo.postConstruct();

Node mark = neo.createNode(map("name", "Mark"));
Node thomas = neo.createNode(map("name", "Thomas"));

neo.createRelationshipBetween(mark, thomas, "WORKS_WITH", map("project", "spring-data"));

neo.index("devs", thomas, "name", "Thomas");
// Cypher TODO
assertEquals("Mark", neo.query("start p=node({person}) match p<-[:WORKS_WITH]-other return other
                                map("person", asList(thomas.getId()))).to(String.class).single());

// Gremlin
assertEquals(thomas, neo.execute("g.v(person).out('WORKS_WITH')",
                                map("person", mark.getId())).to(Node.class).single());

// Index lookup
assertEquals(thomas, neo.lookup("devs", "name", "Thomas").to(Node.class).single());

// Index lookup with Result Converter
assertEquals("Thomas", neo.lookup("devs", "name", "Thomas").to(String.class, new ResultConverter() {
    public String convert(PropertyContainer element, Class<String> type) {
        return (String) element.getProperty("name");
    }
}).single());
```

20.7.2. Core-Operations

`Neo4jTemplate` provides access to some of the methods of the `Neo4j-Core-API` directly. So accessing nodes and relationships (`getReferenceNode`, `getNode`, `getRelationship`, `getRelationshipBetween`), creating nodes and relationships (`createNode`, `createNodeAs`, `createRelationshipBetween`) and deleting them (`delete`, `deleteRelationshipBetween`) are supported. It also provides access to the underlying `GraphDatabase` via `getGraphDatabase`.

20.7.3. Entity-Persistence

`Neo4jTemplate` allows to `save`, `find(One/All)`, `count` `delete` and `projectTo` entities. It provides the stored type information via `getStoredJavaType` and can fetch lazy-loaded entities or load them altogether.

20.7.4. Result

All querying methods of the template return a uniform result type: `Result<T>` which is also an `Iterable<T>`. The query result offers methods of converting each element to a target type `result.to(Type.class)` optionally supplying a `ResultConverter<FROM,TO>` which takes care of custom conversions. By default most query methods can already handle conversions from and to: `Paths`, `Nodes`, `Relationship` and `GraphEntities` as well as conversions backed by registered `ConversionServices`. A converted `Result<FROM>` is an `Iterable<TO>`. Results can be limited to a single value using the `result.single()` or `result.singleOrNull()` methods. It also offers support for a pure callback function using a `Handler<T>`.

20.7.5. Indexing

Adding nodes and relationships to an index is done with the `index()` method.

The `lookup()` methods either take a field/value combination to look for exact matches in the index, or a Lucene query object or string to handle more complex queries. All `lookup()` methods return a `Result<PropertyContainer>` to be used or transformed.

20.7.6. Graph traversal

The traversal methods are at the core of graph operations. The `traverse()` method covers the full traversal operation that takes a `TraversalDescription` (typically built with the `template.getGraphDatabase().traversalDescription()` DSL) and runs it from the given start node. `traverse` returns a `Result<Path>` to be used or transformed.

20.7.7. Cypher Queries

The `Neo4jTemplate` also allows execution of arbitrary Cypher queries. Via the query methods the statement and parameter-Map are provided. Cypher Queries return tabular results, so the `Result<Map<String,Object>>` contains the rows which can be either used as they are or converted as needed.

20.7.8. Gremlin Scripts

Gremlin Scripts can run with the `execute` method, which also takes the parameters that will be available as variables inside the script. The result of the executions is a generic `Result<Object>` fit for conversion or usage.

20.7.9. Transactions

The `Neo4jTemplate` provides implicit transactions for some of its methods. For instance `save` uses them. For other modifying operations please provide Spring Transaction management using `@Transactional` or the `TransactionTemplate`.

20.7.10. Neo4j REST Server

If the template is configured to use a `SpringRestGraphDatabase` the operations that would be expensive over the wire, like traversals and querying are executed efficiently on the server side by using the REST API to forward those calls. All the other template methods require individual network operations.

The REST-batch-mode of the `SpringRestGraphDatabase` is not yet exposed via the template, but it is available via the graph database.

20.8. CRUD with repositories

The repositories provided by Spring Data Neo4j build on the composable repository infrastructure in [Spring Data Commons](#). They allow for interface based composition of repositories consisting of provided default implementations for certain interfaces and additional custom implementations for other methods.

Spring Data Neo4j repositories support annotated and named queries for the Neo4j [Cypher](#) query-language and Gremlin graph DSL.

Spring Data Neo4j comes with typed repository implementations that provide methods for locating node and relationship entities. There are several types of basic repository interfaces and implementations. `CrudRepository` provides basic operations, `IndexRepository` and `NamedIndexRepository` delegate to Neo4j's internal indexing subsystem for queries, and `TraversalRepository` handles Neo4j traversals.

With the `RelationshipOperationsRepository` it is possible to access, create and delete relationships between entities or nodes. The `SpatialRepository` allows geographic searches (Section 20.10, “Geospatial Queries”)

`GraphRepository` is a convenience repository interface, combining `CrudRepository`, `IndexRepository`, and `TraversalRepository`. Generally, it has all the desired repository methods. If other operations are required then the additional repository interfaces should be added to the individual interface declaration.

20.8.1. CrudRepository

`CrudRepository` delegates to the configured `TypeRepresentationStrategy` (see Section 20.14, “Entity type representation”) for type based queries.

Load an entity instance via an id

```
T findOne(id)
```

Check for existence of a id in the graph

```
boolean exists(id)
```

Iterate over all nodes of a node entity type

```
EndResult<T> findAll() (supported in future versions: EndResult<T> findAll(Sort) and
Page<T> findAll(Pageable))
```

Count the instances of the repository entity type

```
Long count()
```

Save entities

```
T save(T) and Iterable<T> save(Iterable<T>)
```

Delete graph entities

```
void delete(T), void; delete(Iterable<T>), and deleteAll()
```

20.8.2. IndexRepository and NamedIndexRepository

`IndexRepository` works with the indexing subsystem and provides methods to find entities by indexed properties, ranged queries, and combinations thereof. The index key is the name of the indexed entity field, unless overridden in the `@Indexed` annotation.

Iterate over all indexed entity instances with a certain field value

```
EndResult<T> findAllByPropertyValue(key, value)
```

Get a single entity instance with a certain field value

```
T findByPropertyValue(key, value)
```

Iterate over all indexed entity instances with field values in a certain numerical range (inclusive)

```
EndResult<T> findAllByRange(key, from, to)
```

Iterate over all indexed entity instances with field values matching the given fulltext string or `QueryContext` query

```
EndResult<T> findAllByQuery(key, queryOrQueryContext)
```

There is also a `NamedIndexRepository` with the same methods, but with an additional index name parameter, making it possible to query any index.

20.8.3. TraversalRepository

`TraversalRepository` delegates to the Neo4j traversal framework.

Iterate over a traversal result

```
Iterable<T> findAllByTraversal(startEntity, traversalDescription)
```

20.8.4. Query and Finder Methods

20.8.4.1. Annotated queries

Queries using the Cypher graph query language can be supplied with the `@Query` annotation. That means every method annotated with `@Query("start n=node:IndexName(key={node or 0}) match (n)-->(m) return m")` will use the supplied query string. The named or indexed parameter `{node}` will be substituted by the actual method parameter. Node and Relationship-Entities are handled directly, Iterables thereof as well. All other parameters are replaced directly (i.e. Strings, Longs, etc). There is special support for the `Sort` and `Pageable` parameters from Spring Data Commons, which are supported to add programmatic paging and sorting (alternatively static paging and sorting can be supplied in the query string itself). For using the named parameters you have to either annotate the parameters of the method with the `@Param("node")` annotation or enable debug symbols. Indexed parameters are always usable.

Gremlin queries can be used similarly, the `@Query` annotation would just need a `type=QueryType.GREMLIN` attribute. Parameters are supported in the same way.

20.8.4.2. Named queries

Spring Data Neo4j also supports the notion of named queries which are externalized in property-config-files (`META-INF/neo4j-named-queries.properties`). Those files have the

format: `Entity.finderName=query` (e.g. `Person.findBoss=start p=node({0}) match (p)-[:BOSS]-(boss) return boss`). Otherwise named queries support the same parameters as annotated queries.

20.8.4.3. Query results

Typical results for queries are `Iterable<Type>`, `Iterable<Map<String, Object>>`, `Type` and `Page<Type>`. Nodes and Relationships are converted to their respective Entities (if they exist). Other values are converted using the registered Spring conversion services (e.g. enums).

20.8.4.4. Cypher examples

There is a [screencast](#) available showing many features of the query language. The following examples are taken from the cineasts dataset of the tutorial section.

```
start n=node(0) return n
    returns the node with id 0
```

```
start movie=node:Movie(title='Matrix') return movie
    returns the nodes which are indexed with title equal to 'Matrix'
```

```
start movie=node:Movie(title='Matrix') match (movie)-[:ACTS_IN]-(actor) return
actor.name
    returns the names of the actors that have a ACTS_IN relationship to the movie node for 'Matrix'
```

```
start movie=node:Movie(title='Matrix') match (movie)-[r:RATED]-(user) where r.stars
> 3 return user.name, r.stars, r.comment
    returns users names and their ratings (>3) of the movie titled 'Matrix'
```

```
start user=node:User(login='micha') match
(user)-[:FRIEND]-(friend)-[r:RATED]->(movie) return movie.title, AVG(r.stars),
COUNT(*) order by AVG(r.stars) desc, COUNT(*) desc
    returns the movies rate by the friends of the user 'micha', aggregated by movie.title, with averaged
    ratings and rating-counts sorted by both
```

Example 20.15. Examples of Cypher queries placed on repository methods with @Query where values are replaced with method parameters, as described in the Section 20.8.4.1, “Annotated queries”) section.

```
public interface MovieRepository extends GraphRepository<Movie> {

    // returns the node with id equal to idOfMovie parameter
    @Query("start n=node({0}) return n")
    Movie getMovieFromId(Integer idOfMovie);

    // returns the nodes which will use index named title equal to movieTitle parameter
    // movieTitle String must not contain any spaces, otherwise you will receive a NullPointerException
    @Query("start movie=node:Movie(title={0}) return movie")
    Movie getMovieFromTitle(String movieTitle);

    // returns the Actors that have a ACTS_IN relationship to the movie node with the title equal to movieTitle
    // (The parenthesis around 'movie' and 'actor' in the match clause are optional.)
    @Query("start movie=node:Movie(title={0}) match (movie)<-[:ACTS_IN]-(actor) return actor")
    Page<Actor> getActorsThatActInMovieFromTitle(String movieTitle, PageRequest);

    // returns users who rate a movie (movie parameter) higher than rating (rating parameter)
    @Query("start movie=node:({0}) " +
           "match (movie)<-[:RATED]-(user) " +
           "where r.stars > {1} " +
           "return user")
    Iterable<User> getUsersWhoRatedMovieFromTitle(Movie movie, Integer rating);

    // returns users who rate a movie based on movie title (movieTitle parameter) higher than rating (rating parameter)
    @Query("start movie=node:Movie(title={0}) " +
           "match (movie)<-[:RATED]-(user) " +
           "where r.stars > {1} " +
           "return user")
    Iterable<User> getUsersWhoRatedMovieFromTitle(String movieTitle, Integer rating);
}
```

20.8.4.5. Queries derived from finder-method names

As known from Rails or Grails it is possible to derive queries for domain entities from finder method names like `Iterable<Person> findByNameAndAgeGreaterThan(String name, int age)`. Using the infrastructure in Spring Data Commons that allows to collect the meta information about entities and their properties a finder method name can be split into its semantic parts and converted into a cypher query. @Indexed fields will be converted into index-lookups of the start clause, navigation along relationships will be reflected in the match clause properties with operators will end up as expressions in the where clause. Order and limiting of the query will be handled by provided Pageable or Sort parameters. The other parameters will be used in the order they appear in the method signature so that should align with the expressions stated in the method name.

Example 20.16. Some examples of methods and resulting cypher queries of a PersonRepository

```

public interface PersonRepository
    extends GraphRepository<Person> {

    // start person=node:Person(id={0}) return person
    Person findById(String id)

    // start person=node:Person({0}) return person - {0} will be "id:"+name
    Iterable<Person> findByNameLike(String name)

    // start person=node:__types__("className"="com...Person")
    // where person.age = {0} and person.married = {1}
    // return person
    Iterable<Person> findByAgeAndMarried(int age, boolean married)

    // start person=node:__types__("className"="com...Person")
    // match person<-[:CHILD]-parent
    // where parent.age > {0} and person.married = {1}
    // return person
    Iterable<Person> findByParentAgeAndMarried(int age, boolean married)
}

```

20.8.4.6. Derived Finder Methods

Use the meta information of your domain model classes to declare repository finders that navigate along relationships and compare properties. The path defined with the method name is used to create a Cypher query that is executed on the graph.

Example 20.17. Repository and usage of derived finder methods

```

@Entity
public static class Person {
    @GraphId Long id;
    private String name;
    private Group group;

    private Person(){}
    public Person(String name) {
        this.name = name;
    }
}

@Entity
public static class Group {
    @GraphId Long id;
    private String title;
    // incoming relationship for the person -> group
    @RelatedTo(type = "group", direction = Direction.INCOMING)
    private Set<Person> members=new HashSet<Person>();

    private Group(){}
    public Group(String title, Person...people) {
        this.title = title;
        members.addAll(asList(people));
    }
}

public interface PersonRepository extends GraphRepository<Person> {
    Iterable<Person> findByGroupTitle(String name);
}

@Autowired PersonRepository personRepository;

Person oliver=personRepository.save(new Person("Oliver"));
final Group springData = new Group("spring-data",oliver);
groupRepository.save(springData);

final Iterable<Person> members = personRepository.findByGroupTitle("spring-data");
assertThat(members.iterator().next().name, is(oliver.name));

```

20.8.5. CypherDSL repository

Spring Data Neo4j supports the new cypher-dsl to write Cypher queries in a statically typed way. Just by including `CypherDslRepository` to your repository you get the `Page<T> query(Execute query, params, Pageable page)` and the `EndResult<T> query(Execute query, params);`. The result type of the Cypher-DSL builder is called `Execute`

Example 20.18. Examples for Cypher-DSL repository

```

public interface PersonRepository extends GraphRepository<Person>,
    CypherDslRepository<Person> {}

@Autowired PersonRepository repo;
// START company=node:Company(name={name}) MATCH company<-[:WORKS_AT]->person RETURN person

Execute query = start( lookup( "company", "Company", "name", param("name") ) ).
    match( path().from( "company" ).in( "WORKS_AT" ).to( "person" ) ).
    returns( nodes( "person" ) )
Page<Person> people = repo.query(query , map("name","Neo4j"), new PageRequest(1,10));

QPerson person = QPerson.person;
QCompany company = QCompany.company;
Execute query = start( lookup( company, "Company", company.name, param("name") ) ).
    match( path().from( company ).in( "WORKS_AT" ).to( person ) ).
    .where(person.firstName.like("P*").and(person.age.gt(25))).
    returns( nodes( person ) )
EndResult<Person> people = repo.query(query , map("name","Neo4j"));

```

20.8.6. CypherDSL and QueryDSL

It is possible to use the Cypher DSL along with the predicates and code generation features of the QueryDSL project. This will allow you to use Java objects as part of the query, rather than strings, for the names of properties and such. In order to get this to work you first have to add a code processor to your Maven build, which will parse your domain entities marked with `@NodeEntity`, and from that generate QPerson-style classes, as shown in the previous section. Here is what you need to include in your Maven POM file.

```

<plugin>
  <groupId>com.mysema.maven</groupId>
  <artifactId>maven-apt-plugin</artifactId>
  <version>1.0.2</version>
  <configuration>
    <processor>org.springframework.data.neo4j.querydsl.SDNAnnotationProcessor</processor>
  </configuration>
  <executions>
    <execution>
      <id>test-sources</id>
      <phase>generate-test-sources</phase>
      <goals>
        <goal>test-process</goal>
      </goals>
      <configuration>
        <outputDirectory>target/generated-sources/test</outputDirectory>
      </configuration>
    </execution>
  </executions>
</plugin>

```

This custom QueryDSL AnnotationProcessor will generate the query classes that can be used when constructing CypherDSL queries, as in the previous section.

20.8.7. Creating repositories

The Repository instances should normally be injected but can also be created manually via the `Neo4jTemplate`.

Example 20.19. Using basic GraphRepository methods

```

public interface PersonRepository extends GraphRepository<Person> {}

@Autowired PersonRepository repo;
// OR
GraphRepository<Person> repo = template
    .repositoryFor(Person.class);

Person michael = repo.save(new Person("Michael", 36));

Person dave = repo.findOne(123);

Long numberOfPeople = repo.count();

EndResult<Person> devs = graphRepository.findAllByPropertyValue("occupation", "developer");

EndResult<Person> middleAgedPeople = graphRepository.findAllByRange("age", 20, 40);

EndResult<Person> aTeam = graphRepository.findAllByQuery("name", "A*");

Iterable<Person> aTeam = repo.findAllByQuery("name", "A*");

Iterable<Person> davesFriends = repo.findAllByTraversal(dave,
    Traversal.description().pruneAfterDepth(1)
    .relationships(KNOWS).filter(returnAllButStartNode()));

```

20.8.8. Composing repositories

The recommended way of providing repositories is to define a repository interface per domain class. The mechanisms provided by the repository infrastructure will automatically detect them, along with additional implementation classes, and create an injectable repository implementation to be used in services or other spring beans.

Example 20.20. Composing repositories

```

public interface PersonRepository extends GraphRepository<Person>, PersonRepositoryExtension {}

// configure the repositories, preferably via the neo4j:repositories namespace
// (template reference is optional)
<neo4j:repositories base-package="org.example.repository"
    graph-database-context-ref="template"/>

// have it injected
@Autowired
PersonRepository personRepository;
// or created via the template
PersonRepository personRepository = template.repositoryFor(Person.class);

Person michael = personRepository.save(new Person("Michael",36));

Person dave=personRepository.findOne(123);

Iterable<Person> devs = personRepository.findAllByPropertyValue("occupation","developer");

Iterable<Person> aTeam = graphRepository.findAllByQuery( "name","A*");

Iterable<Person> friends = personRepository.findFriends(dave);

// alternatively select some of the required repositories individually
public interface PersonRepository extends CRUDGraphRepository<Node,Person>,
    IndexQueryExecutor<Node,Person>, TraversalQueryExecutor<Node,Person>,
    PersonRepositoryExtension {}

// provide a custom extension if needed
public interface PersonRepositoryExtension {
    Iterable<Person> findFriends(Person person);
}

public class PersonRepositoryImpl implements PersonRepositoryExtension {
    // optionally inject default repository, or use DirectGraphRepositoryFactory
    @Autowired PersonRepository baseRepository;
    public Iterable<Person> findFriends(Person person) {
        return baseRepository.findAllByTraversal(person, friendsTraversal);
    }
}

// configure the repositories, preferably via the datagraph:repositories namespace
// (template reference is optional)
<neo4j:repositories base-package="org.springframework.data.neo4j"
    graph-database-context-ref="template"/>

// have it injected
@Autowired
PersonRepository personRepository;

Person michael = personRepository.save(new Person("Michael",36));

Person dave=personRepository.findOne(123);

EndResult<Person> devs = personRepository.findAllByPropertyValue("occupation","developer");

EndResult<Person> aTeam = graphRepository.findAllByQuery( "name","A*");

Iterable<Person> friends = personRepository.findFriends(dave);

```



Note

If you use `<context:component-scan>` in your spring config, please make sure to put it behind `<neo4j:repositories>`, as the `RepositoryFactoryBean` adds new bean definitions for all the declared repositories, the context scan doesn't pick them up otherwise.

20.9. Projecting entities

As the underlying data model of a graph database doesn't imply and enforce strict type constraints like a relational model does, it offers much more flexibility on how to model your domain classes and which of those to use in different contexts.

For instance an order can be used in these contexts: customer, procurement, logistics, billing, fulfillment and many more. Each of those contexts requires its distinct set of attributes and operations. As Java doesn't support mixins one would put the sum of all of those into the entity class and thereby making it very big, brittle and hard to understand. Being able to take a basic order and project it to a different (not related in the inheritance hierarchy or even an interface) order type that is valid in the current context and only offers the attributes and methods needed here would be very beneficial.

Spring Data Neo4j offers initial support for projecting node and relationship entities to different target types. All instances of this projected entity share the same backing node or relationship, so changes are reflected on the same data.

This could for instance also be used to handle nodes of a traversal with a unified (simpler) type (e.g. for reporting or auditing) and only project them to a concrete, more functional target type when the business logic requires it.

Example 20.21. Projection of entities

```
@NodeEntity
class Trainee {
    String name;
    @RelatedTo
    Set<Training> trainings;
}

for (Person person : graphRepository.findAllByPropertyValue("occupation", "developer")) {
    Developer developer = person.projectTo(Developer.class);
    if (developer.isJavaDeveloper()) {
        trainInSpringData(developer.projectTo(Trainee.class));
    }
}
```

20.10. Geospatial Queries

`SpatialRepository` is a dedicated `Repository` for spatial queries. Spring Data Neo4j provides an optional dependency to [neo4j-spatial](#) which is an advanced library for GIS operations. So if you include the maven dependency in your `pom.xml`, Neo4j-Spatial and the required `SPATIAL` index provider is available.

Example 20.22. Neo4j-Spatial Dependencies

```
<dependency>
  <groupId>org.neo4j</groupId>
  <artifactId>neo4j-spatial</artifactId>
  <version>0.7-SNAPSHOT</version>
</dependency>
```

To have your entities available for spatial index queries, please include a String property containing a "well known text", location string. WKT is the [Well Known Text Spatial Format](#) eg. POINT(LON LAT) or POLYGON ((LON1 LAT1 LON2 LAT2 LON3 LAT3 LON1 LAT1))

Example 20.23. Fields of Well Known Text

```
@NodeEntity
class Venue {
    String name;
    @Indexed(type = POINT, indexName = "VenueLocation") String wkt;
    public void setLocation(float lon, float lat) {
        this.wkt = String.format("POINT( %.2f %.2f )", lon, lat);
    }
}

venue.setLocation(56,15);
```

After adding the SpatialRepository to your repository you can use the findWithinBoundingBox, findWithinDistance, findWithinWellKnownText.

Example 20.24. Spatial Queries

```
Iterable<Person> teamMembers = personRepository.findWithinBoundingBox("personLayer", 55, 15, 57, 15);
Iterable<Person> teamMembers = personRepository.findWithinWellKnownText("personLayer", "POLYGON ((15 55, 15 57, 17 57, 17 55, 15 55))");
Iterable<Person> teamMembers = personRepository.findWithinDistance("personLayer", 16, 56, 70);
```

Example 20.25. Methods of the Spatial Repository

```
public interface SpatialRepository<T> {
    ClosableIterable<T> findWithinBoundingBox(String indexName, double lowerLeftLat,
                                              double lowerLeftLon,
                                              double upperRightLat,
                                              double upperRightLon);

    ClosableIterable<T> findWithinDistance( final String indexName, final double lat, double lon, double distance);

    ClosableIterable<T> findWithinWellKnownText( final String indexName, String wellKnownText);
}
```

20.11. Active Record Methods for Advanced Mapping Mode

This chapter only applies to the advanced mapping. Currently the Aspects introduce the following methods by default, this will change in the future, there will be separate Mixin-Interfaces that can selectively mixed into the domain entities if needed. Otherwise the AspectJ interaction will be restricted to field access interception and post constructor handling.

The node and relationship aspects introduce (via AspectJ ITD - inter type declaration) several methods to the entities.

Persisting the node entity after creation and after changes outside of a transaction. Participates in an open transaction, or creates its own implicit transaction otherwise.

```
nodeEntity.persist()
```

Accessing node and relationship IDs

```
nodeEntity.getNodeId() and relationshipEntity.getRelationshipId()
```

Accessing the node or relationship backing the entity

```
entity.getPersistentState()
```

`equals()` and `hashCode()` are delegated to the underlying state

```
entity.equals() and entity.hashCode()
```

Creating relationships to a target node entity, and returning the relationship entity instance

```
nodeEntity.relateTo(targetEntity, relationshipClass, relationshipType)
```

Retrieving a single relationship entity

```
nodeEntity.getRelationshipTo(targetEntity, relationshipClass, relationshipType)
```

Creating relationships to a target node entity and returning the relationship

```
nodeEntity.relateTo(targetEntity, relationshipType)
```

Retrieving a single relationship

```
nodeEntity.getRelationshipTo(targetEnttiy, relationshipType)
```

Removing a single relationship

```
nodeEntity.removeRelationshipTo(targetEntity, relationshipType)
```

Remove the node entity, its relationships, and all index entries for it

```
nodeEntity.remove() and relationshipEntity.remove()
```

Project entity to a different target type, using the same backing state

```
entity.projectTo(targetClass)
```

Traverse, starting from the current node. Returns end nodes of traversal converted to the provided type.

```
nodeEntity.findAllByTraversal(targetType, traversalDescription)
```

Traverse, starting from the current node. Returns `EntityPaths` of the traversal result bound to the provided start and end-node-entity types

```
Iterable<EntityPath> findAllPathsByTraversal(traversalDescription)
```

Executes the given Cypher query, providing the `{self}` variable with the node-id and returning the results converted to the target type.

```
<T> Iterable<T> NodeBacked.findAllByQuery(final String query, final Class<T> targetType)
```

Executes the given query, providing `{self}` variable with the node-id and returning the original result, but with nodes and relationships replaced by their appropriate entities.

```
Iterable<Map<String, Object>> NodeBacked.findAllByQuery(final String query)
```

Executes the given query, providing `{self}` variable with the node-id and returns a single result converted to the target type.

```
<T> T NodeBacked.findByQuery(final String query, final Class<T> targetType)
```

20.12. Transactions

Neo4j is a transactional database, only allowing modifications to be performed within transaction boundaries. Reading data does however not require transactions. Spring Data Neo4j integrates nicely with both the declarative transaction support with `@Transactional` as well as the manual transaction handling with `TransactionTemplate`. It also supports the rollback mechanisms of the Spring Testing library.

Spring Data Neo4j integrates with transaction managers configured using Spring. The simplest scenario of just running the graph database uses a `SpringTransactionManager` provided by the Neo4j kernel to be used with Spring's `JtaTransactionManager`. That is, configuring Spring to use Neo4j's transaction manager.



Note

To avoid name collisions the transaction manager configured by Spring Data Neo4j is called `neo4jTransactionManager` and is aliased to `transactionManager`. So defining a separate `transactionManager` bean should not interfere with Spring Data Neo4j operations.



Note

The explicit XML configuration given below is encoded in the `Neo4jConfiguration` configuration bean that uses Spring's `@Configuration` feature. This greatly simplifies the configuration of Spring Data Neo4j.

Example 20.26. Simple transaction manager configuration

```
<bean id="neo4jTransactionManager"
  class="org.springframework.transaction.jta.JtaTransactionManager">
  <property name="transactionManager">
    <bean class="org.neo4j.kernel.impl.transaction.SpringTransactionManager">
      <constructor-arg ref="graphDatabaseService"/>
    </bean>
  </property>
  <property name="userTransaction">
    <bean class="org.neo4j.kernel.impl.transaction.UserTransactionImpl">
      <constructor-arg ref="graphDatabaseService"/>
    </bean>
  </property>
</bean>

<tx:annotation-driven mode="aspectj" transaction-manager="neo4jTransactionManager"/>
```

For scenarios with multiple transactional resources there are two options. The first option is to have Neo4j participate in the externally configured transaction manager using the Spring support in Neo4j by enabling the configuration parameter for your graph database. Neo4j will then use Spring's transaction manager instead of its own.

Example 20.27. Neo4j Spring integration

```

<![CDATA[<context:annotation-config />
<context:spring-configured/>

<bean id="transactionManager"
      class="org.springframework.transaction.jta.JtaTransactionManager">
  <property name="transactionManager">
    <bean id="jotm" class="org.springframework.data.neo4j.transaction.JotmFactoryBean"/>
  </property>
</bean>

<bean id="graphDatabaseService" class="org.neo4j.kernel.EmbeddedGraphDatabase"
      destroy-method="shutdown">
  <constructor-arg value="target/test-db"/>
  <constructor-arg>
    <map>
      <entry key="tx_manager_impl" value="spring-jta"/>
    </map>
  </constructor-arg>
</bean>

<tx:annotation-driven mode="aspectj" transaction-manager="transactionManager"/>

```

One can also configure a stock XA transaction manager (e.g. Atomikos, JOTM, App-Server-TM) to be used with Neo4j and the other resources. For a bit less secure but fast 1-phase-commit-best-effort, use `ChainedTransactionManager`, which comes bundled with Spring Data Neo4j. It takes a list of transaction managers as constructor params and will handle them in order for transaction start and commit (or rollback) in the reverse order.

Example 20.28. ChainedTransactionManager example

```

<![CDATA[<bean id="jpaTransactionManager"
      class="org.springframework.orm.jpa.JpaTransactionManager">
  <property name="entityManagerFactory" ref="entityManagerFactory"/>
</bean>
<bean id="jtaTransactionManager"
      class="org.springframework.transaction.jta.JtaTransactionManager">
  <property name="transactionManager">
    <bean class="org.neo4j.kernel.impl.transaction.SpringTransactionManager">
      <constructor-arg ref="graphDatabaseService" />
    </bean>
  </property>
  <property name="userTransaction">
    <bean class="org.neo4j.kernel.impl.transaction.UserTransactionImpl">
      <constructor-arg ref="graphDatabaseService" />
    </bean>
  </property>
</bean>
<bean id="transactionManager"
      class="org.springframework.data.neo4j.transaction.ChainedTransactionManager">
  <constructor-arg>
    <list>
      <ref bean="jpaTransactionManager"/>
      <ref bean="jtaTransactionManager"/>
    </list>
  </constructor-arg>
</bean>

<tx:annotation-driven mode="aspectj" transaction-manager="transactionManager"/>

```

20.13. Detached node entities in advanced mapping mode

This section only applies to the advanced mapping (AspectJ-backed). The simple mapping always detaches entities on load as it copies the data out of the graph into the entities and stores it back fully too.

Node entities can be in two different persistence states: attached or detached. By default, newly created node entities are in the detached state. When `persist()` or `template.save()` is called on the entity, it becomes attached to the graph, and its properties and relationships are stored in the database. If the save operation is not called within a transaction, it automatically creates an implicit transaction only for the operation.

Changing an attached entity inside a transaction will immediately write through the changes to the datastore. Whenever an entity is changed outside of a transaction it becomes detached. The changes are stored in the entity (its fields) itself until the next call to a save operation.

All entities returned by library functions are initially in an attached state. Just as with any other entity, changing them outside of a transaction detaches them, and they must be reattached with `persist()` for the data to be saved.

Example 20.29. Persisting entities

```
@NodeEntity
class Person {
    String name;
    Person(String name) { this.name = name; }
}

// Store Michael in the database.
Person p = new Person("Michael").persist();
```

20.13.1. Relating detached entities

As mentioned above, an entity simply created with the `new` keyword starts out detached. It also has no state assigned to it. If you create a new entity with `new` and then throw it away, the database won't be touched at all.

Now consider this scenario:

Example 20.30. Relationships outside of transactions

```
@NodeEntity
class Movie {
    private Actor topActor;
    public void setTopActor(Actor actor) {
        topActor = actor;
    }
}

@NodeEntity
class Actor {
}

Movie movie = new Movie();
Actor actor = new Actor();

movie.setTopActor(actor);
```

Neither the actor nor the movie has been assigned a node in the graph. If we were to call `movie.persist()`, then Spring Data Neo4j would first create a node for the movie. It would then note that there is a relationship to an actor, so it would call `actor.persist()` in a cascading fashion. Once the actor has been persisted, it will create the relationship from the movie to the actor. All of this will be done atomically in one transaction.

Important to note here is that if `actor.persist()` is called instead, then only the actor will be persisted. The reason for this is that the actor entity knows nothing about the movie entity. It is the movie entity that has the reference to the actor. Also note that this behavior is not dependent on any configured relationship direction on the annotations. It is a matter of Java references and is not related to the data model in the database.

The save operation (merge) stores all properties of the entity to the graph database and puts the entity in attached mode. There is no need to update the reference to the Java POJO as the underlying backing node handles the read-through transparently. If multiple object instances that point to the same node are persisted, the ordering is not important as long as they contain distinct changes. For concurrent changes a concurrent modification exception is thrown (subject to be parameterized in the future).

If the relationships form a cycle, then the entities will first of all be assigned a node in the database, and then the relationships will be created. The cascading of `persist()` is however only cascaded to related entity fields that have been modified.

In the following example, the actor and the movie are both attached entities, having both been previously persisted to the graph:

Example 20.31. Cascade for modified fields

```
actor.setName("Billy Bob");
movie.persist();
```

In this case, even though the movie has a reference to the actor, the name change on the actor will not be persisted by the call to `movie.persist()`. The reason for this is, as mentioned above, that cascading will only be done for fields that have been modified. Since the `movie.topActor` field has not been modified, it will not cascade the persist operation to the actor.

20.14. Entity type representation

There are several ways to represent the Java type hierarchy of the data model in the graph. In general, for all node and relationship entities, type information is needed to perform certain repository operations. Some of this type information hierarchy is saved in the graph database.

As the type information is also stored in node/relationship-properties and/or indexes it might amount to a substantial amount of data in the graph. It is possible to use an `@TypeAlias("name")` annotation on nodes and relationships to have a short constant name for each type which is (unlike the default approach) renaming-refactoring-safe. For using the simple class name by default, register a `Neo4jMappingContext` bean configured with an instance of `EntityAlias`. It is also possible to opt out of storing type information using the `NoopTypeRepresentationStrategies`.

Implementations of `TypeRepresentationStrategy` take care of persisting this information during entity instance creation. They also provide the repository methods that use this type information

to perform their operations, like `findAll` and `count`. The derived `finderMethods` also use the type information for graph global queries.

There are three available implementations for node entities to choose from.

- `IndexingNodeTypeRepresentationStrategy` this is the default strategy used.

Stores entity types in the integrated index. Each entity node gets indexed with its type and all supertypes and interfaces that are also `@NodeEntity`-annotated. The special index used for this is named `__types__`. Additionally, in order to retrieve the type of an entity node, each node has a property `__type__` with the fully qualified type of that entity.

- `SubReferenceNodeTypeRepresentationStrategy`

Stores entity types in a tree in the graph representing the type and interface hierarchy. Each entity has a `INSTANCE_OF` relationship to a type node representing that entity's type. The type may or may not have a `SUBCLASS_OF` relationship to another type node.

- `NoopNodeTypeRepresentationStrategy`

Does not store any type information, and does hence not support finding by type, counting by type, or retrieving the type of any entity.

There are two implementations for relationship entities available, same behavior as the corresponding ones above:

- `IndexingRelationshipTypeRepresentationStrategy`

Stores relationship entity types in the integrated index. Each entity relationship gets indexed with its type and all supertypes and interfaces that are also `@RelationshipEntity`-annotated. The special index used for this is named `__rel_types__`. Additionally, in order to retrieve the type of an entity relationship, each relationship has a property `__type__` with the fully qualified type of that entity.

- `NoopRelationshipTypeRepresentationStrategy`

Spring Data Neo4j will by default autodetect which are the most suitable strategies for node and relationship entities. For new data stores, it will always opt for the indexing strategies. If a data store was created with the older `SubReferenceNodeTypeRepresentationStrategy`, then it will continue to use that strategy for node entities. It will however in that case use the no-op strategy for relationship entities, which means that the old data stores have no support for searching for relationship entities. The indexing strategies are recommended for all new users.

20.15. Bean validation (JSR-303)

Spring Data Neo4j supports property-based validation support. When a property is changed and persisted, it is checked against the annotated constraints, e.g. `@Min`, `@Max`, `@Size`, etc. Validation errors throw a `ValidationException`. The validation support that comes with Spring is used for evaluating the constraints. To use this feature, a validator has to be registered with the `Neo4jTemplate`, which is done automatically by the `Neo4jConfiguration` if one is present in the Spring Config.

Example 20.32. Bean validation

```
@NodeEntity
class Person {
    @Size(min = 3, max = 20)
    String name;

    @Min(0) @Max(100)
    int age;
}
```

Chapter 21. Environment setup

Spring Data Neo4j dramatically simplifies development, but some setup is naturally required. For building the application, Maven needs to be configured to include the Spring Data Neo4j dependencies. For the advanced mapping mode, it is necessary to configure the AspectJ weaving. After the build setup is complete, the Spring application needs to be configured to make use of Spring Data Neo4j. Examples for these different setups can be found in the [Spring Data Neo4j examples](#).

Spring Data Neo4j projects can be built using Maven. There are also means to build them with Gradle or Ant/Ivy.

21.1. Dependencies for Spring Data Neo4j Simple Mapping

For the simple POJO mapping it is enough to add the `org.springframework.data:spring-data-neo4j:2.0.0.RELEASE` dependency to your project. If you want to use the Cypher query language please add `org.neo4j:neo4j-cypher:1.6`

Example 21.1. Maven dependencies for Spring Data Neo4j

```
<dependency>
<groupId>org.springframework.data</groupId>
<artifactId>spring-data-neo4j</artifactId>
<version>2.0.0.RELEASE</version>
</dependency>
```

21.2. Gradle configuration for Advanced Mapping (AspectJ)

The necessary build plugin to build Spring Data Neo4j projects with Gradle is available as part of the Spring Data Neo4j distribution or on Github which makes the usage as easy as:

Example 21.2. Gradle Build Configuration

```
sourceCompatibility = 1.6
targetCompatibility = 1.6

springVersion = "3.0.7.RELEASE"
springDataNeo4jVersion = "2.0.0.RELEASE"
aspectjVersion = "1.6.12"

apply from: 'https://github.com/SpringSource/spring-data-neo4j/raw/master/build/gradle/springdataneoj.gradle'

configurations {
    runtime
    testCompile
}

repositories {
    mavenCentral()
    mavenLocal()
    mavenRepo urls: "http://maven.springframework.org/release"
}
```

The actual `springdataneoj.gradle` is very simple, just decorating the `javac` tasks with the `iaj` ant task.

21.3. Ant/Ivy configuration for Advanced Mapping (AspectJ)

The supplied sample ant [build configuration](#) is mainly about resolving the dependencies for Spring Data Neo4j Aspects and AspectJ using Ivy and integrating the `iajc` ant task in the build.

Example 21.3. Ant/Ivy Build Configuration

```
<taskdef resource="org/aspectj/tools/ant/taskdefs/aspectjTaskdefs.properties" classpath="${lib.dir}/a
<target name="compile" description="Compile production classes" depends="lib.retrieve">
  <mkdir dir="${main.target}" />

  <iajc sourceroots="${main.src}" destDir="${main.target}" classpathref="path.libs" source="1.6">
    <aspectpath>
      <pathelement location="${lib.dir}/spring-aspects.jar"/>
    </aspectpath>
    <aspectpath>
      <pathelement location="${lib.dir}/spring-data-neo4j-aspects.jar"/>
    </aspectpath>
  </iajc>
</target>
```

21.4. Maven configuration for Advanced Mapping

Spring Data Neo4j projects are easiest to build with Apache Maven. The core dependency is Spring Data Neo4j Aspects which comes with transitive dependencies to Spring Data Neo4j, Spring Data Commons, parts of the Spring Framework, AspectJ and the Neo4j graph database.

21.4.1. Repositories

The milestone releases of Spring Data Neo4j are available from the dedicated milestone repository. Neo4j releases and milestones are available from Maven Central.

Example 21.4. Spring milestone repository

```
<repository>
  <id>spring-maven-milestone</id>
  <name>Springframework Maven Repository</name>
  <url>http://maven.springframework.org/milestone</url>
</repository>
```

21.4.2. Dependencies

The dependency on `spring-data-neo4j-aspects` will transitively pull in the necessary parts of Spring Framework (core, context, aop, aspects, tx), AspectJ, Neo4j, and Spring Data Commons. If you already use these (or different versions of these) in your project, then include those dependencies on your own. In this case, please make sure that the versions match. If you want to use Cypher or Gremlin, please add the dependencies (which are optional in SDN) accordingly.

Example 21.5. Maven dependencies

```
<dependency>
  <groupId>org.springframework.data</groupId>
  <artifactId>spring-data-neo4j-aspects</artifactId>
  <version>2.0.0.RELEASE</version>
</dependency>

<dependency>
  <groupId>org.aspectj</groupId>
  <artifactId>aspectjrt</artifactId>
  <version>1.6.12</version>
</dependency>
[<dependency>
  <groupId>org.neo4j</groupId>
  <artifactId>neo4j-cypher</artifactId>
  <version>1.6</version>
</dependency>]
```

21.4.3. Maven AspectJ build configuration

Since the advanced mapping uses AspectJ for build-time aspect weaving of entities, it is necessary to hook the AspectJ Maven plugin into the build process. The plugin also has its own dependencies. You also need to explicitly specify the aspect libraries (spring-aspects and spring-data-neo4j-aspects).

Example 21.6. AspectJ configuration

```

<plugin>
  <groupId>org.codehaus.mojo</groupId>
  <artifactId>aspectj-maven-plugin</artifactId>
  <version>1.2</version>
  <dependencies>
    <!-- NB: You must use Maven 2.0.9 or above or these are ignored (see MNG-2972) -->
    <dependency>
      <groupId>org.aspectj</groupId>
      <artifactId>aspectjrt</artifactId>
      <version>1.6.12</version>
    </dependency>
    <dependency>
      <groupId>org.aspectj</groupId>
      <artifactId>aspectjtools</artifactId>
      <version>1.6.12</version>
    </dependency>
  </dependencies>
  <executions>
    <execution>
      <goals>
        <goal>compile</goal>
        <goal>test-compile</goal>
      </goals>
    </execution>
  </executions>
  <configuration>
    <outxml>true</outxml>
    <aspectLibraries>
      <aspectLibrary>
        <groupId>org.springframework</groupId>
        <artifactId>spring-aspects</artifactId>
      </aspectLibrary>
      <aspectLibrary>
        <groupId>org.springframework.data</groupId>
        <artifactId>spring-data-neo4j-aspects</artifactId>
      </aspectLibrary>
    </aspectLibraries>
    <source>1.6</source>
    <target>1.6</target>
  </configuration>
</plugin>

```

21.5. Spring configuration

Users of Spring Data Neo4j have two ways of very concisely configuring it. Either they can use a Spring Data Neo4j XML configuration namespace, or they can use a Java-based bean configuration.

21.5.1. XML namespace

The XML namespace can be used to configure Spring Data Neo4j. The `config` element provides an XML-based configuration of Spring Data Neo4j in one line. It has three attributes. `graphDatabaseService` points out the Neo4j instance to use. For convenience, `storeDirectory` can be set instead of `graphDatabaseService` to point to a directory where a new `EmbeddedGraphDatabase` will be created. For cross-store configuration, the `entityManagerFactory` attribute needs to be configured.

Example 21.7. XML configuration with store directory

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<beans xmlns="http://www.springframework.org/schema/beans"
       xmlns:context="http://www.springframework.org/schema/context"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
       xmlns:neo4j="http://www.springframework.org/schema/data/neo4j"
       xsi:schemaLocation="
           http://www.springframework.org/schema/beans
           http://www.springframework.org/schema/beans/spring-beans-3.0.xsd
           http://www.springframework.org/schema/context
           http://www.springframework.org/schema/context/spring-context-3.0.xsd
           http://www.springframework.org/schema/data/neo4j
           http://www.springframework.org/schema/data/neo4j/spring-neo4j-2.0.xsd">

    <context:annotation-config/>
    <neo4j:config storeDirectory="target/config-test"/>

</beans>
```

Example 21.8. XML configuration with GraphDatabaseService bean

```
<context:annotation-config/>

<bean id="graphDatabaseService" class="org.neo4j.kernel.EmbeddedGraphDatabase"
      destroy-method="shutdown">
    <constructor-arg index="0" value="target/config-test"/>
    <!-- optionally pass in neo4j-config parameters to the graph database
    <constructor-arg index="1">
        <map>
            <entry key="allow_store_upgrade" value="true"/>
        </map>
    </constructor-arg>
-->
</bean>

<neo4j:config graphDatabaseService="graphDatabaseService"/>
```

Example 21.9. XML configuration with GraphDatabaseService bean

```
<context:annotation-config/>

<bean id="graphDatabaseService" class="org.neo4j.kernel.EmbeddedGraphDatabase"
      destroy-method="shutdown">
    <constructor-arg index="0" value="foo/db" />
    <constructor-arg index="1">
        <map><entry key="enable_remote_shell" value="true"/></map>
    </constructor-arg>
</bean>

<bean id="serverWrapper" class="org.neo4j.server.WrappingNeoServerBootstrapper"
      init-method="start" destroy-method="stop">
    <constructor-arg ref="graphDatabaseService"/>
</bean>
```

Example 21.10. XML configuration with cross-store

```

<context:annotation-config/>

<bean class="org.springframework.orm.jpa.LocalContainerEntityManagerFactoryBean"
      id="entityManagerFactory">
  <property name="dataSource" ref="dataSource"/>
  <property name="persistenceXmlLocation" value="classpath:META-INF/persistence.xml"/>
</bean>

<neo4j:config storeDirectory="target/config-test"
              entityManagerFactory="entityManagerFactory"/>

```

21.5.2. Repository Configuration

Spring Data Neo4j repositories are configured using the `<neo4j:repositories>` element which defines the base-package (or packages) for the repositories. A reference to an existing Neo4jTemplate bean reference can be passed in as well.

As Spring Data Neo4j repositories build upon the infrastructure provided by [Spring Data Commons](#), the configuration options for repositories described there work here as well.

Example 21.11. XML configuration for repositories

```

<neo4j:repositories base-package="org.example.repository"/>

<!-- with template bean reference -->
<neo4j:repositories base-package="org.example.repository" graph-database-context-ref="template"/>

```

21.5.3. Java-based bean configuration

You can also configure Spring Data Neo4j using Java-based bean metadata.

**Note**

For those not familiar with Java-based bean configuration in Spring, we recommend that you read up on it first. The Spring documentation has a [high-level introduction](#) as well as [detailed documentation](#) on it.

In order to configure Spring Data Neo4j with Java-based bean config, the class `Neo4jConfiguration` is registered with the context. This is either done explicitly in the context configuration, or via classpath scanning for classes that have the `@Configuration` annotation. The only thing that must be provided is the `GraphDatabaseService`. The example below shows how to register the `@Configuration` `Neo4jConfiguration` class, as well as Spring's `ConfigurationClassPostProcessor` that transforms the `@Configuration` class to bean definitions.

Example 21.12. Java-based bean configuration

```
<![CDATA[<beans ...>
    ...
    <tx:annotation-driven mode="aspectj" transaction-manager="transactionManager"/>
    <bean class="org.springframework.data.neo4j.config.Neo4jConfiguration"/>

    <bean class="org.springframework.context.annotation.ConfigurationClassPostProcessor"/>

    <bean id="graphDatabaseService" class="org.neo4j.kernel.EmbeddedGraphDatabase"
        destroy-method="shutdown" scope="singleton">
        <constructor-arg index="0" value="target/config-test"/>
    </bean>
    ...
</beans>
```

Additional beans can be configured to be included in the Neo4j-Configuration just by defining them in the Spring context. `ConversionService` for custom conversions, `Validators` for bean validation, `TypeRepresentationStrategyFactory` for configuring the in graph type representation, `IndexProviders` for custom index handling (e.g. for multi-tenancy), `Entity-Instantiators` (with their config) to have more control over the creation of entity instances and much more.

Chapter 22. Cross-store persistence

The Spring Data Neo4j project support cross-store persistence for the advanced mapping mode, which allows for parts of the data to be stored in a traditional JPA data store (RDBMS), and other parts in a graph store. This means that an entity can be partially stored in e.g. MySQL, and partially stored in Neo4j.

This allows existing JPA-based applications to embrace NOSQL data stores for evolving certain parts of their data model. Possible use cases include adding social networking or geospatial information to existing applications.

22.1. Partial entities

Partial graph persistence is achieved by restricting the Spring Data Neo4j aspects to manage only explicitly annotated parts of the entity. Those fields will be made `@Transient` by the aspect so that JPA ignores them.

A backing node in the graph store is only created when the entity has been assigned a JPA ID. Only then will the association between the two stores be established. Until the entity has been persisted, its state is just kept inside the POJO (in detached state), and then flushed to the backing graph database on the persist operation.

The association between the two entities is maintained via a `FOREIGN_ID` field in the node, that contains the JPA ID. Currently only single-value IDs are supported. The entity class can be resolved via the `TypeRepresentationStrategy` that manages the Java type hierarchy within the graph database. Given the ID and class, you can then retrieve the appropriate JPA entity for a given node.

The other direction is handled by indexing the Node with the `FOREIGN_ID` index which contains a concatenation of the fully qualified class name of the JPA entity and the ID. The matching node can then be found using the indexing facilities, and the two entities can be reassociated.

Using these mechanisms and the Spring Data Neo4j aspects, a single POJO can contain some fields handled by JPA and others handles by Spring Data Neo4j. This also includes relationship fields persisted in the graph database.

22.2. Cross-store annotations

Cross-store persistence only requires the use of one additional annotation: `@GraphProperty`. See below for details and an example.

22.2.1. `@NodeEntity(partial = "true")`

When annotating an entity with `partial = true`, this marks it as a cross-store entity. Spring Data Neo4j will thus only manage fields explicitly annotated with `@GraphProperty`.

22.2.2. `@GraphProperty`

Fields of primitive or convertible types do not normally have to be annotated in order to be persisted by Spring Data Neo4j. In cross-store mode, Spring Data Neo4j *only* persists fields explicitly annotated with `@GraphProperty`. JPA will ignore these fields.

22.2.3. Example

The following example is taken from the [Spring Data Neo4j examples](#) myrestaurants-social project:

Example 22.1. Cross-store node entity

```
@Entity
@Table(name = "user_account")
@NodeEntity(partial = true)
public class UserAccount {
    private String userName;
    private String firstName;
    private String lastName;

    @GraphProperty
    String nickname;

    @RelatedTo
    Set<UserAccount> friends;

    @RelatedToVia(type = "recommends")
    Iterable<Recommendation> recommendations;

    @Temporal(TemporalType.TIMESTAMP)
    @DateTimeFormat(style = "S-")
    private Date birthDate;

    @ManyToMany(cascade = CascadeType.ALL)
    private Set<Restaurant> favorites;

    @Id
    @GeneratedValue(strategy = GenerationType.AUTO)
    @Column(name = "id")
    private Long id;

    public void knows(UserAccount friend) {
        relateTo(friend, "friends");
    }

    public Recommendation rate(Restaurant restaurant, int stars, String comment) {
        Recommendation recommendation = relateTo(restaurant, Recommendation.class, "recommends");
        recommendation.rate(stars, comment);
        return recommendation;
    }

    public Iterable<Recommendation> getRecommendations() {
        return recommendations;
    }
}
```

22.3. Configuring cross-store persistence

Configuring cross-store persistence is done similarly to the default Spring Data Neo4j configuration. All you need to do is to specify an `entityManagerFactory` in the XML namespace config element, and Spring Data Neo4j will configure itself for cross-store use.

Example 22.2. Cross-store Spring configuration

```
<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:context="http://www.springframework.org/schema/context"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:datagraph="http://www.springframework.org/schema/data/neo4j"
  xsi:schemaLocation="
    http://www.springframework.org/schema/beans
    http://www.springframework.org/schema/beans/spring-beans-3.0.xsd
    http://www.springframework.org/schema/context
    http://www.springframework.org/schema/context/spring-context-3.0.xsd
    http://www.springframework.org/schema/data/neo4j
    http://www.springframework.org/schema/data/neo4j/spring-neo4j-2.0.xsd
  ">

  <context:annotation-config/>

  <neo4j:config storeDirectory="target/config-test"
    entityManagerFactory="entityManagerFactory"/>

  <bean class="org.springframework.orm.jpa.LocalContainerEntityManagerFactoryBean"
    id="entityManagerFactory">
    <property name="dataSource" ref="dataSource"/>
    <property name="persistenceXmlLocation" value="classpath:META-INF/persistence.xml"/>
  </bean>
</beans>
```

Chapter 23. Sample code

23.1. Introduction

Spring Data Neo4j comes with a number of sample applications. The source code of the samples can be found on [Github](#). The different sample projects are introduced below.


23.2. Hello Worlds sample application

The Hello Worlds sample application is a simple console application. It creates some worlds (node entities) and rocket routes (relationships) between worlds, all in a galaxy (the graph), and then prints them.

The unit tests demonstrate some other features of Spring Data Neo4j as well. The sample comes with a minimal configuration for Maven and Spring to get up and running quickly.

The Hello Worlds application is available both for the simple mapping (`hello-worlds`) and for the advanced mapping (`hello-world-aspects`).

Executing the application creates the following graph in the graph database:

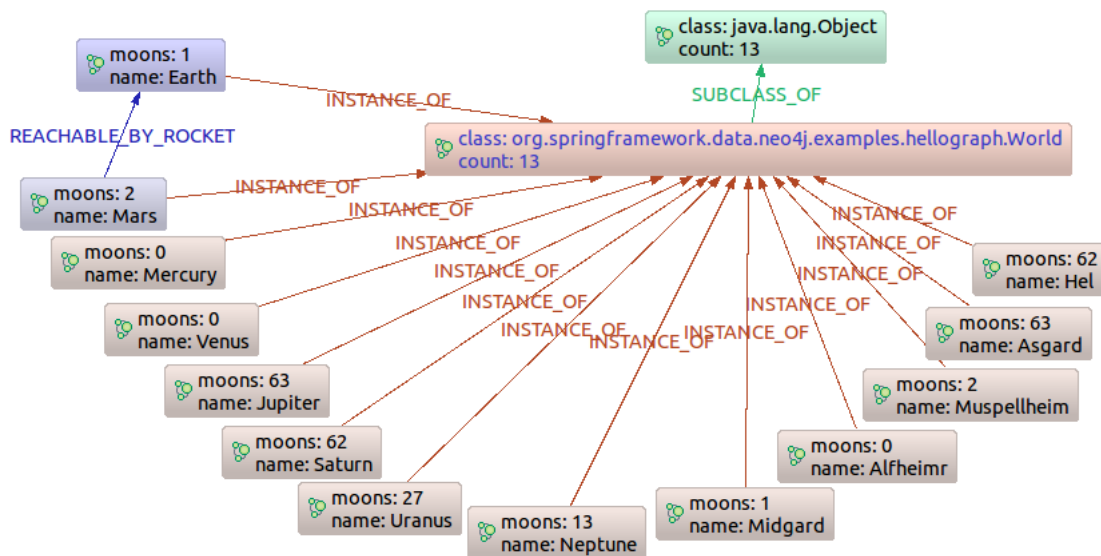


23.3. IMDB sample application

The IMDB sample is a web application that imports datasets from the Internet Movie Database (IMDB) into the graph database. It allows the listing of movies with their actors, and of actors and their roles in different movies. It also uses graph traversal operations to calculate the [Bacon number](#) of any given actor. This sample application shows the usage of Spring Data Neo4j in a more complex setting, using several annotated entities and relationships as well as indexes and in-graph indexes and graph traversals.

See the readme file for instructions on how to compile and run the application.

An excerpt of the data stored in the graph database after executing the application:

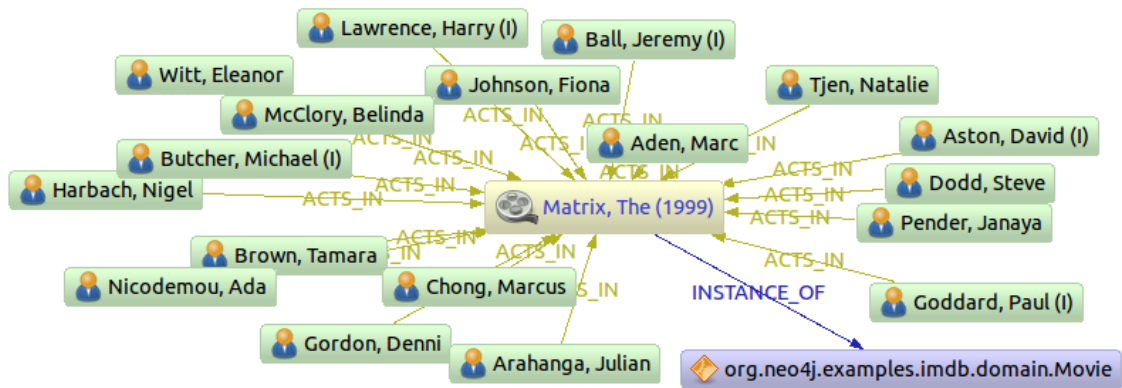

23.4. MyRestaurants sample application

Simple, JPA-based web application for managing users and restaurants, with the ability to add restaurants as favorites to a user. It is basically the foundation for the MyRestaurants-Social application (see Section 23.5, “MyRestaurant-Social sample application”), and does therefore not use Spring Data Neo4j.

USER ACCOUNT		Name	Zip Code	City	State		
Log out		Subway	53073	Plymouth	WI		
RESTAURANT		Boston Mar	20877	Gaithersbu	MD		
List all Restaurants		Subway Sub	88008	Santa Tere	NM		
Manage favorite Restaurants		Arby's Roa	97603	Klamath Fa	OR		
		Bellefleur	92008	Carlsbad	CA		
		Huddle Hou	30701	Calhoun	GA		
		John Brown	46235	Indianapol	IN		
		Ling's Exp	53217	Milwaukee	WI		
		Chubys's	97044	Odell	OR		
		Bojangles	29203	Columbia	SC		

List results per page: [5](#) [10](#) [15](#) [20](#) [25](#) | Page 1 of 5

[Home](#) | [Logout](#) | Language: | Theme: [standard](#) | [alt](#)

Sponsored by SpringSource

23.5. MyRestaurant-Social sample application

This application extends the MyRestaurants sample application, adding social networking functionality to it with cross-store persistence. The web application allows for users to add friends and rate restaurants. A graph traversal provides recommendations based on your friends' (and their friends') rating of restaurants.

Here's an excerpt of the data stored in the graph database after executing the application:


+ NOW WITH SOCIAL NETWORKING


USER ACCOUNT
 Log out

RESTAURANT
 List all Restaurants
 Manage favorite Restaurants

RECOMMENDATION
 List my Recommendations


FRIEND
 Create a new Friend
 List my Friends
 List Top Rated Restaurants

▼ List all Top Rated Restaurants

Name	Recommendations	Avg. Rating
Subway	2	3.5

[Home](#) | [Logout](#) | Language:  | Theme: [standard](#) | [alt](#)

Sponsored by SpringSource 

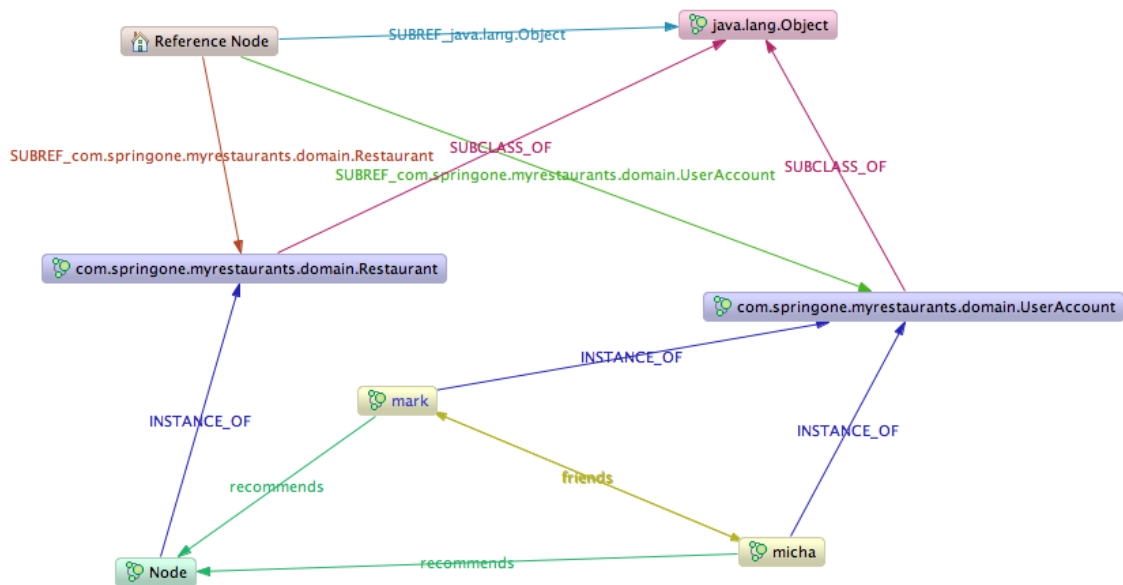


23.6. Cineasts social movie database

The cineasts.net application was introduced extensively in the first part of this guide, the tutorial. The tutorial covers the development of the simple mapping version of cineasts.

To document the differences, versions for the advanced mapping (cineasts-aspects) and accessing the remote server (cineasts-rest) are also available.

A online version of cineasts can be found on cineasts.net. A sample dataset of the cineasts database is available at the neo4j [sample-data page](#).

This is a subset of the visualization of the cineasts graph for the "Matrix" movie.

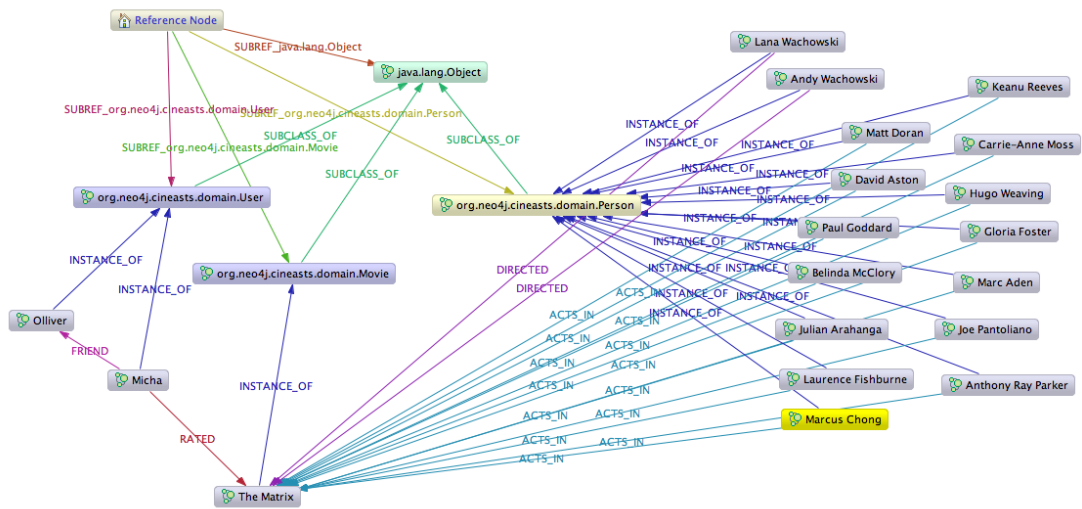

Chapter 24. Heroku: Seeding the Cloud

Deploying your application into the cloud is a great way to scale from from "wouldn't it be cool if.." to giving interviews to Forbes, Fast Company, and Jimmy Fallon. Heroku makes it super easy to provision everything you need, including a Neo4j Add-on. With a few simple adjustments, your Spring Data Neo4j application is ready to take that first step into the cloud.

To deploy your Spring Data Neo4j web application to Heroku, you'll need:

- account on [Heroku](#)
- git command line
- maven-based project
- standard Spring MV Servlet application
- well, and Spring Data Neo4j REST

For reference, the following sections detail the steps taken to make the Spring Data Neo4j Todos example ready for deployment to Heroku.

24.1. Create a Self-Hosted Web Application

Usually, a Spring MVC application is bundled into a war and deployed to an application server like Tomcat. But Heroku can host any kind of java application. It just needs to know what to launch. So, we'll transform the war into a self-hosted servlet using an embedded Jetty server, then add a startup script to launch it.

First, we'll add the dependencies for Jetty to the `pom.xml`:

Example 24.1. Jetty dependencies - `pom.xml`

```
<dependency>
  <groupId>org.eclipse.jetty</groupId>
  <artifactId>jetty-webapp</artifactId>
  <version>7.4.4.v20110707</version>
</dependency>
<dependency>
  <groupId>org.mortbay.jetty</groupId>
  <artifactId>jsp-2.1-glassfish</artifactId>
  <version>2.1.v20100127</version>
</dependency>
```

Then we'll change the scope of the `servlet-api` artifact from `provided` to `compile`. This library is normally provided at runtime by the application container. Since we're self-hosting, it needs to be included directly. Make sure the `servlet-api` dependency looks like this:

Example 24.2. servlet-api dependencies - pom.xml

```
<dependency>
  <groupId>javax.servlet</groupId>
  <artifactId>servlet-api</artifactId>
  <version>2.5</version>
  <scope>compile</scope>
</dependency>
```

We could provide a complicated command-line to Heroku to launch the app. Instead, we'll simplify the command-line by using the `appassembler-maven-plugin` to create a launch script. Add the plugin to your pom's `build/plugins` section:

Example 24.3. appassembler-maven-plugin configuration pom.xml

```
<plugin>
<groupId>org.codehaus.mojo</groupId>
<artifactId>appassembler-maven-plugin</artifactId>
<version>1.1.1</version>
<executions>
  <execution>
    <phase>package</phase>
    <goals><goal>assemble</goal></goals>
    <configuration>
      <assembleDirectory>target</assembleDirectory>
      <extraJvmArguments>-Xmx512m</extraJvmArguments>
      <programs>
        <program>
          <mainClass>Main</mainClass>
          <name>webapp</name>
        </program>
      </programs>
    </configuration>
  </execution>
</executions>
</plugin>
```

Finally, switch the packaging from `war` to `jar`. That's it for the pom.

Now that the application is ready to be self-hosted, create a simple `Main` to bootstrap Jetty and host the servlet.

Example 24.4. src/main/java/Main.java

```
import org.eclipse.jetty.server.Server;
import org.eclipse.jetty.webapp.WebAppContext;
public class Main {
    public static void main(String[] args) throws Exception {
        String webappDirLocation = "src/main/webapp/";
        String webPort = System.getenv("PORT");
        if(webPort == null || webPort.isEmpty()) {
            webPort = "8080";
        }
        Server server = new Server(Integer.valueOf(webPort));
        WebAppContext root = new WebAppContext();
        root.setContextPath("/");
        root.setDescriptor(webappDirLocation+"/WEB-INF/web.xml");
        root.setResourceBase(webappDirLocation);
        root.setParentLoaderPriority(true);
        server.setHandler(root);
        server.start();
        server.join();
    }
}
```

Notice the use of environment variable "PORT" for discovering which port to use. Heroku and the Neo4j Add-on use a number of environment variable to configure the application. Next, we'll modify the Spring application context to use the Neo4j variables for specifying the connection to Neo4j itself.

In the SDN Todos example, src/main/resources/META-INF/spring/ applicationContext-graph.xml was modified to look like this:

Example 24.5. Spring Data Neo4j REST configuration - applicationContext-graph.xml

```
<neo4j:config graphDatabaseService="graphDatabaseService"/>
<bean id="graphDatabaseService"
    class="org.springframework.data.neo4j.rest.SpringRestGraphDatabase">
    <constructor-arg index="0" value="${NEO4J_REST_URL}" />
    <constructor-arg index="1" value="${NEO4J_LOGIN}" />
    <constructor-arg index="2" value="${NEO4J_PASSWORD}" />
</bean>
```

Before provisioning at Heroku, test the application locally. First make sure you've got Neo4j server running locally, using default configuration. Then set the following environment variables:

Example 24.6. environment variables

```
export NEO4J_REST_URL=http://localhost:7474/db/data
export NEO4J_LOGIN=""
export NEO4J_PASSWORD=""
```

Now you can launch the app by running `sh target/bin/webapp`. If running the SDN Todos example, you can test it by running `./bin/todos list`. That should return an empty JSON array, since no todos have been created yet.

For details about the todos script, see the readme included with the example.

24.2. Deploy to Heroku

With a self-hosted application ready, deploying to Heroku needs a few more steps. First, create a Procfile at the top-level of the project, which will contain a single line identifying the command line which launches the application.

The contents of the Procfile should contain:

Example 24.7. Procfile

```
web: sh target/bin/webapp
```

Example 24.8. deploy to heroku

```
# Initialize a local git repository, adding all the project files
git init
git add .
git commit -m "initial commit"

# Provision a Heroku stack, add the Neo4j Add-on and deploy the application

heroku create --stack cedar
heroku addons:add neo4j
git push heroku master
```



Note

Note that the stack must be "cedar" to support running Java. Check that the process is running by using `heroku ps`, which should show a "web.1" process in the "up" state. Success!

For the SDN Todos application, you can try out the remote application using the `-r` switch with the `bin/todo` script like this:

Example 24.9. Session with todo script

```
./bin/todo -r mk "tweet thanks for the good work @mesirii @akollegger"
./bin/todo -r list
```

To see the Neo4j graph you just created through Heroku, use `heroku config` to reveal the `NEO4J_URL` environment variable, which will take you to Neo4j's Webadmin.

Chapter 25. Performance considerations

Although adding layers of abstraction is a common pattern in software development, each of these layers generally adds overhead and performance penalties. This chapter discusses the performance implications of using Spring Data Neo4j instead of the Neo4j API directly.

25.1. When to use Spring Data Neo4j

The focus of Spring Data Neo4j is to add a convenience layer on top of the Neo4j API. This enables developers to get up and running with a graph database very quickly, having their domain objects mapped to the graph with very little work. Building on this foundation, one can later explore other, more efficient ways to explore and process the graph - if the performance requirements demand it.

Like with any other object mapping framework, the domain entities that are created, read, or persisted represent only a small fraction of the data stored in the database. This is the set needed for a certain use-case to be displayed, edited or processed in a low throughput fashion. The main advantages of using an object mapper in this case are the ease of use of real domain objects in your business logic and also the integration with existing frameworks and libraries that expect Java POJOs as input or create them as results.

Spring Data Neo4j, however, was not designed with a major focus on performance. It does add some overhead to pure graph operations.

Most of the overhead comes from the use of the Java Reflection API, which is used to provide information about annotations, fields and constructors. Some of the information is already cached by the JVM and the library infrastructure from Spring-Data-Commons, so that only the first access gets a performance penalty. Other reflection penalties like field or method access will occur all the time.

For the *simple mapping* it is important to be aware of the size graph of data that is pulled out of the graph database in a single read and copied to domain entities. That's why Spring Data Neo4j loads related data not by default. You have to provide an indicator (`@Fetch`) to do so. Alternatively the `Neo4jTemplate.fetch` method offers means of loading entities and collections of those.

For the *advanced mapping mode* keep in mind that any access of properties and relationships will in general read through down to the database. To avoid multiple reads, it is sensible to store the result in a local variable in suitable scope (e.g. method, class or jsp).

To evaluate if the performance of Spring Data Neo4j impacts a certain use-case it is sensible to define performance requirements and measure the actual time in realistic test scenarios for the use-case. Only if Spring Data Neo4j doesn't perform as fast as required it is recommended to drop down to the native Neo4j API.

Chapter 26. AspectJ details

The advanced mapping mode of Spring Data Neo4j relies heavily on AspectJ. AspectJ is a Java implementation of the [aspect-oriented programming](#) paradigm that allows easy extraction and controlled application of so-called cross-cutting concerns. Cross-cutting concerns are typically repetitive tasks in a system (e.g. logging, security, auditing, caching, transaction scoping) that are difficult to extract using the normal OO paradigms. Many OO concepts, such as subclassing, polymorphism, overriding and delegation are still cumbersome to use with many of those concerns applied in the code base. Also, the flexibility becomes limited, potentially adding quite a number of configuration options or parameters.

The AspectJ pointcut language can be intimidating, but a developer using Spring Data Neo4j will not have to deal with that. Users don't have care about hooking into a framework mechanism, or having to extend a framework superclass.

AspectJ uses a declarative approach, defining concrete "advice", which is just pieces of code that contain the implementation of the "concern", as it is called. AspectJ advice can for instance be applied before, after, or instead of a method or constructor call. It can also be applied on variable and field access. This is declared using AspectJ's expressive pointcut language, able to express any place within a code structure or flow. AspectJ is also able to introduce new methods, fields, annotations, interfaces, and superclasses to existing classes.

Spring Data Neo4j uses a mix of these mechanisms internally. First, when encountering the `@NodeEntity` or `@RelationshipEntity` annotations it introduces a new interface `NodeBacked` or `RelationshipBacked` to the annotated class. Secondly, it introduces fields and methods to the annotated class. See Section 20.11, "Active Record Methods for Advanced Mapping Mode" for more information on the methods introduced.

Spring Data Neo4j also leverages AspectJ to intercept access to fields, delegating the calls to the graph database instead. Under the hood, properties and relationships will be created.

So how is an aspect applied to a concrete class? At compile time, the AspectJ Java compiler (ajc) takes source files and aspect definitions, and compiles the source files while adding all the necessary interception code for the aspects to hook in where they're declared to. This is known as *compile-time weaving*. At runtime only a small AspectJ runtime is needed, as the byte code of the classes has already been rewritten to delegate the appropriate calls via the declared advice in the aspects.



Note

A caveat of using compile-time weaving is that all source files that should be part of the weaving process must be compiled with the AspectJ compiler. Fortunately, this is all taken care of seamlessly by the AspectJ Maven plugin.

AspectJ also supports other types of weaving, e.g. load-time weaving and runtime weaving. These are currently not supported by Spring Data Neo4j.

Chapter 27. Neo4j Server

Neo4j is not only available in embedded mode. It can also be installed and run as a stand-alone server accessible via a REST API. Developers can integrate Spring Data Neo4j into the Neo4j server infrastructure in two ways: in an unmanaged server extension, or via the REST API.

27.1. Server Extension

When should you write a server extension? The default REST API is essentially a REST'ified representation of the Neo4j core API. It is nice for getting started, and for simpler scenarios. For more involved solutions that require high-volume access or more complex operations, writing a server extension that is able to process external parameters, do all the computations locally in the plugin, and then return just the relevant information to the calling client is preferable.

The Neo4j Server has two built-in extension mechanisms. It is possible to extend existing URI endpoints like the graph database, nodes, or relationships, adding new URIs or methods to those. This is achieved by writing a [server plugin](#). This plugin type has some restrictions however.

For complete freedom in the implementation, an [unmanaged extension](#) can be used. Unmanaged extensions are essentially [Jersey](#) resource implementations. The resource constructors or methods can get the `GraphDatabaseService` injected to execute the necessary operations and return appropriate `Representations`.

Both kinds of extensions have to be packaged as JAR files and added to the Neo4j Server's plugin directory. Server Plugins are picked up by the server at startup if they provide the necessary `META-INF/services/org.neo4j.server.plugins.ServerPlugin` file for Java's `ServiceLoader` facility. Unmanaged extensions have to be registered with the Neo4j Server configuration.

Example 27.1. Configuring an unmanaged extension

```
org.neo4j.server.thirdparty_jaxrs_classes=com.example.mypackage=/my-context
```

Running Spring Data Neo4j on the Neo4j Server is easy. You need to tell the server where to find the Spring context configuration file, and which beans from it to expose:

Example 27.2. Server plugin initialization

```
public class HelloWorldInitializer extends SpringPluginInitializer {
    public HelloWorldInitializer() {
        super(new String[]{"spring/helloWorldServer-Context.xml"},
            Pair.of("worldRepository", WorldRepository.class),
            Pair.of("template", Neo4jTemplate.class));
    }
}
```

Now, your resources can require the Spring beans they need, annotated with `@Context` like this:

Example 27.3. Jersey resource

```
@Path( "/path" )
@POST
@Produces( MediaType.APPLICATION_JSON )
public void foo( @Context WorldRepository repo ) {
    ...
}
```

The `SpringPluginInitializer` merges the server provided `GraphDatabaseService` with the Spring configuration and registers the named beans as Jersey Injectables. It is still necessary to list the initializer's fully qualified class name in a file named `META-INF/services/org.neo4j.server.plugins.PluginLifecycle`. The Neo4j Server can then pick up and run the initialization classes before the extensions are loaded.

27.2. Using Spring Data Neo4j as a REST client

To use REST-API the Neo4j Server exposes, one would either go with REST libraries on the lower level or choose one of the Neo4j related rest drivers in various languages. For Java Neo4j provides the [Neo4j Java REST bindings](#) which come as a drop in replacement for the `GraphDatabaseService` API. Spring Data Neo4j REST uses those bindings to provide seamless access to a remote Neo4j Database.

By simply configuring the `graphDatabaseService` to be a `SpringRestGraphDatabase` pointing to a Neo4j Server instance and referring to that from `<neo4j:config>` Spring Data Neo4j will use the server side database for both the simple mapping as well as the advanced mapping.



Note

The Neo4j Server REST API does not allow for transactions to span across requests, which means that Spring Data Neo4j is not transactional across multiple operations when running with a `SpringRestGraphDatabase`.

Please also keep in mind that performing graph operations via the REST-API is about one order of magnitude slower than local operations. Try to use the Neo4j Cypher query language, server-side traversals (`RestTraversal`) or Gremlin expressions whenever possible for retrieving large sets of data. Future versions of Spring Data Neo4j will use the more performant batch API as well as a binary protocol.

To set up your project to use the REST bindings, add this dependency to your `pom.xml`:

Example 27.4. REST-Client configuration - pom.xml

```
<dependency>
  <groupId>org.springframework.data</groupId>
  <artifactId>spring-data-neo4j-rest</artifactId>
  <version>2.0.0.RELEASE</version>
</dependency>
```

Now, you set up the normal Spring Data Neo4j configuration, but point the database to an URL instead of a local directory, like so:

Example 27.5. REST client configuration - application context

```
<neo4j:config graphDatabaseService="graphDatabaseService"/>

<bean id="graphDatabaseService" class="org.springframework.data.neo4j.rest.SpringRestGraphDatabase">
  <constructor-arg value="http://localhost:7474/db/data/" index="0"/>
  <!-- for running against a server requiring authentication
  <constructor-arg value="username" index="1"/>
  <constructor-arg value="password" index="2"/>
  -->
</bean>
```

Your project is now set up to work against a remote Neo4j Server.

For traversals and Cypher and Gremlin graph queries it is sensible to forward those to the remote endpoint and execute them there instead of walking the graph over the wire. `SpringRestGraphDatabase` already supports that by providing methods that forward to the remote instance. (e.g. `queryEngineFor()`, `index()` and `createTraversalDescription()`). Please use those methods when interacting with a remote server for optimal performance. Those methods are also used by the `Neo4jTemplate` and the mapping infrastructure automatically.